

BallastWise[®]



FLUORESCENT BALLAST SPECIFICATIONS

DESCRIPTION

CATALOG NO.	TYPE	STARTING METHOD	NUMBER OF LAMPS	LAMP TYPE
DXE2H8U	Electronic	Instant Start	2 or 1	F32T8,F25T8,F17T8 F32T8,F25T8,F17T8


ELECTRICAL CHARACTERISTICS

INPUT VOLTAGE	REQUENCY	LAMP WATTS	INPUT WATTS	INPUT CURRENT	THD	PF	SOUND RATED A	
120V/277V	50/60Hz	32W,25W,17W 32W,25W,17W	74W/72W	0.62A/0.26A	<10%	>0.99		
MIN START TEMP	Class P	TYPE 1 Outdoor	BALLAST FACTOR		BEF	O.C.V.	BALLAST FREQUENCY	NO PCB'S
0°F/-18°C			1.18	1.59/1.64	580VRMS	>40kHz		

PHYSICAL CHARACTERISTICS

	CASE DIMENSIONS				
	UNITS	M	L	W	H
	INCHES	8.90	9.50	1.70	1.20
	TOL(+/-)	0.05	0.05	0.05	0.05
CONNECTOR WIRETRIP					
UNITS	BLACK	WHITE	RED	BLUE	
INCHES	1x16	1x16	1x36	2x24	
TOL(+/-)	+ 3/8, - 0	+ 3/8, - 0	+ 3/8, - 0	+ 3/8, - 0	

PRODUCT PHOTO

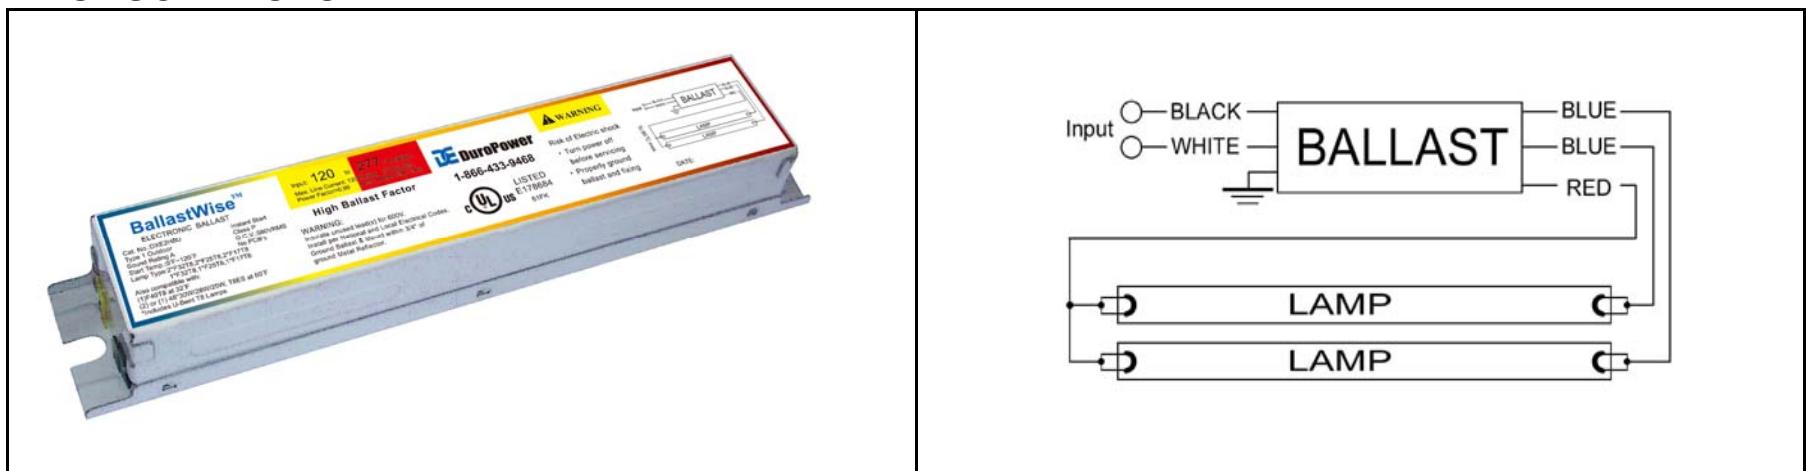

PRODUCT LABEL

<p>BallastWise[™] ELECTRONIC BALLAST</p> <p>Cat. No.:DXE2H8U Type 1 Outdoor Sound Rating A Start Temp.:0°F-120°F Lamp Type:2*F32T8,2*F25T8,2*F17T8 1*F32T8,1*F25T8,1*F17T8</p> <p>Also compatible with: (1)F40T8 at 32°F (2) or (1) 48"30W/28W/25W, T8ES at 60°F *Includes U-Bent T8 Lamps</p>	<p>Input: 120 to 277 V 50/60Hz Max. Line Current: 120V/0.62A 277V/0.26A Power Factor>0.99 Line Current THD<10%</p> <p>High Ballast Factor</p> <p>WARNING: Insulate unused lead(s) for 600V. Install per National and Local Electrical Codes. Ground Ballast & Mount within 3/4" of ground Metal Reflector.</p>	<p>DuroPower 1-866-433-9468</p> <p>LISTED E178684 61FK</p>	<p>WARNING</p> <p>Risk of Electric shock</p> <ul style="list-style-type: none"> Turn power off before servicing Properly ground ballast and fixing 	<p>DATE:</p>
--	--	--	---	--------------