

BallastWise[®]



FLUORESCENT BALLAST SPECIFICATIONS


DESCRIPTION

CATALOG	TYPE	STARTING METHOD	NUMBER OF LAMPS	LAMP TYPE
DXE113M5	Electronic	Rapid Start	1	F13T5, F8T5

ELECTRICAL CHARACTERISTICS

INPUT VOLTAGE	LAMP WATTS	INPUT WATTS	INPUT CURRENT	OCV	PF	FREQUENCY	SOUND RATED
120V	13w, 8w	13w	Max. 0.18A	400VRMS	0.60	60HZ	A
MIN START TEMP	CLASS	TYPE	BALLAST FACTOR	BEF	THD(1)	NO PCB'S	
0°F	P	1 Outdoor	0.92	7.077	<110%		

PHYSICAL CHARACTERISTICS



CASE DIMENSIONS

UNITS	M	L	W	H
INCHES	5.30	5.50	1.00	1.00
TOL (+/-)	0.05	0.05	0.05	0.05

LEAD LENGTH

UNITS	BLACK	WHITE	RED	BLUE
INCHES	1×8	1×8	2×16	2×16
TOL (+/-)	+ 3/8, - 0	+ 3/8, - 0	+ 3/8, - 0	+ 3/8, - 0


CARTON CHARACTERISTICS

UNITS/CARTON	CARTONS/LAYER	#OF LAYER	UNITS/PALLET	PIECE WEIGHT	CARTON WEIGHT	PALLET WEIGHT
64				0.35 lbs	22.58 lbs	
CARTONS/PALLET	CARTON DIMENSIONS	PALLET DIMENSIONS	PALLET DIMENSIONS LOADED, INCLUDING WOOD PALLET			
	14.8×12.8×5.9					

PRODUCT PHOTO



ELECTRICAL DIAGRAM

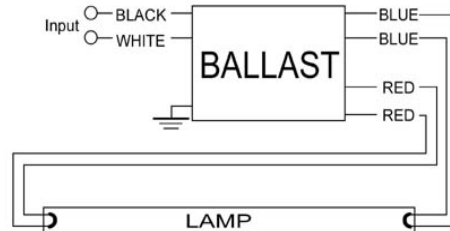

PRODUCT LABEL

Ballast WiseTM
ELECTRONIC BALLAST

Cat No: DXE113M5 Type 1 Outdoor
Input: 120V/60Hz Rapid Start
Max Current: 0.18A Sound Rating: A
Power Factor: 0.60 O.C.V.: 400VRMS
Start Temp: 0°F-120°F Class P
Linear Lamp: 1' F13T5, 1' F8T5

LISTED E178984
UL US 6876

DEXIN LIGHTING
1-888-4DEXIN8

WARNING
Insulate unused lead(s) for 1000V.
Install per National and Local Electrical Codes.
Ground Ballast & Mount within 3/4" of ground Metal Reflector.

DATE: _____