

BallastWise[®]



FLUORESCENT BALLAST SPECIFICATIONS

DESCRIPTION

CATALOG	TYPE	STARTING METHOD	NUMBER OF LAMPS	LAMP TYPE
DXE113MPL2	Electronic	Rapid Start	1	PL13w

ELECTRICAL CHARACTERISTICS

INPUT VOLTAGE	LAMP WATTS	INPUT WATTS	INPUT CURRENT	OCV	PF	FREQUENCY	SOUND RATED
120V	13w	13w	0.10A	400VRMS	0.60	60HZ	A
MIN START TEMP	CLASS	TYPE	BALLAST FACTOR	BEF	THD(1)	NO PCB'S	
0°F	P	1 Outdoor	0.92	7.077	<110%		

PHYSICAL CHARACTERISTICS

	CASE DIMENSIONS				
	UNITS	M	L	W	H
	INCHES	3.16	3.36	1.85	1.00
	TOL (+/-)	0.05	0.05	0.05	0.05
	LEAD LENGTH				
	UNITS	BLACK	WHITE	RED	BLUE
INCHES	1×8	1×8	2×12	2×12	
TOL (+/-)	+ 3/8, - 0	+ 3/8, - 0	+ 3/8, - 0	+ 3/8, - 0	


CARTON CHARACTERISTICS

UNITS/CARTON	CARTONS/LAYER	#OF LAYER	UNITS/PALLET	PIECE WEIGHT	CARTON WEIGHT	PALLET WEIGHT
56				0.3 lbs	18.6 lbs	
CARTONS/PALLET	CARTON DIMENSIONS	PALLET DIMENSIONS	PALLET DIMENSIONS LOADED, INCLUDING WOOD PALLET			
	14.2×12.2×5.3					

PRODUCT PHOTO



ELECTRICAL DIAGRAM

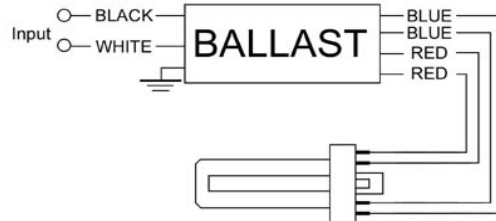

PRODUCT LABEL

<p>LISTED E178684 61FK</p> <p>DEXIN LIGHTING 1-866-4DEXIN8</p>	<p>Ballast WiseTM ELECTRONIC BALLAST MODEL NO.:DXE113MPL Ground Ballast & Mount Within 3/4" of ground Metal Reflector. WARNING: Insulate unused lead(s) for 1000V. Install per National and Local Electrical Codes.</p>	<p>Input: 277V 60Hz Max. Line Current 0.10A Medium Power Factor</p> <p>Type I Outdoor Rapid Start Sound Rating: A O.C.V.: 400VRMS Start Temp: 0°F-120°F Class: P No PCB'S FCC PART 18 Lamp Type: 1*13WPL</p>
	<p>DATE:</p>	

