

BallastWise



FLUORESCENT BALLAST SPECIFICATIONS

DESCRIPTION

CATALOG	TYPE	STARTING METHOD	NUMBER OF LAMPS	LAMP TYPE
DXE2HO5U	ELECTRONIC	Program Rapid Start	2 or 1	F54T5H0, FT55w, FT50w, FT36w, FC12T5, F58T8

ELECTRICAL CHARACTERISTICS

INPUT VOLTAGE	LAMP WATTS	INPUT WATTS	INPUT CURRENT	SOUND RATED	FREQUENCY	OCV
120V to 277V	54w, 55w, 50w, 36w, 40w, 58w	118/117w	0.99A/0.43A	A	50/60HZ	450VRMS
MIN START TEMP	BALLAST FACTOR	CLASS	TYPE	PF	BEF	THD (1)
0° F	1.0	P	1 Outdoor	>0.99	0.847/0.855	<10%
NO PCB'S						


PHYSICAL CHARACTERISTICS

	CASE DIMENSIONS					
	UNITS	M	L	W	H	
	INCHES	16.2	16.88	1.20	1.00	
	TOL (+/-)	0.05	0.05	0.05	0.05	
CONNECTOR WIRETRIP						
	RED	BLUE	YELLOW	BROWN	ORANGE	BLUE/WHITE
	2	2	2	2	2	2


CARTON CHARACTERISTICS

UNITS/CARTON	CARTONS/LAYER	#OF LAYER	UNITS/PALLET	PIECE WEIGHT	CARTON WEIGHT	PALLET WEIGHT
24				1.3 lbs	33.1 lbs	
CARTONS/PALLET	CARTON DIMENSIONS	PALLET DIMENSIONS	PALLET DIMENSIONS LOADED, INCLUDING WOOD PALLET			
	16.9×7.6×4.4					

PRODUCT PHOTO

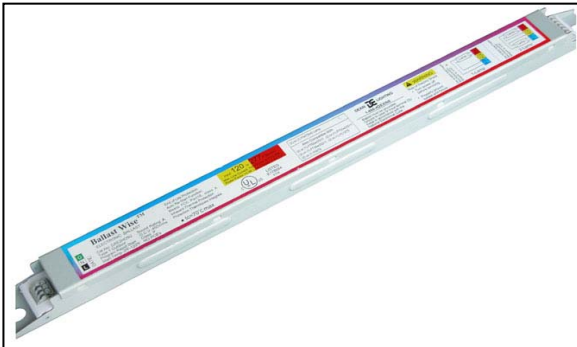

ELECTRICAL DIAGRAM

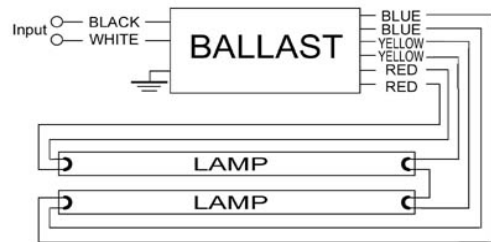

PRODUCT LABEL

	Ballast Wise™ ELECTRONIC BALLAST Cat No: DXE2HO5U Sound Rating: A Type 1 Outdoor O.C.V.: 450Vrms Program Rapid Start Class P Start Temp: 0F-120F NO PCB'S	End of Life Protection Auto Re-Start Function Meets FCC Part18, class A Inherent Thermal Protection Protection Thermiques Integre • tc=70°C max	Input: 120 to 277 Volts AC Max. Line Current: 1.0/0.43A (120/277V) Power Factor: >0.99 See Catalog for details	(1) or (1) F54T5H0 lamp Also Compatible With (2) or (1) FT55w/2G11, (2) or (1) FT50w/2G11 (2) or (1) FT36w/2G11, (2) or (1) FC12T5 (2) or (1) F58T8	DEXIN LIGHTING 1-866-4DEXIN8 Ballast must be grounded Ground to case or input terminal (G) Install in accordance with the National Electrical Code	WARNING Risk of Electric Shock • Turn power off before servicing. • Properly ground ballast and fixture		
	Use 18 AWG Solid Copper Wire for Connections Stripped for 1/2"							

