

BallastWise®



FLUORESCENT BALLAST SPECIFICATIONS

DESCRIPTION

CATALOG	TYPE	STARTING METHOD	NUMBER OF LAMPS	LAMP TYPE
DXE118M8	Electronic	Rapid Start	1	F18T8

ELECTRICAL CHARACTERISTICS

INPUT VOLTAGE	LAMP WATTS	INPUT WATTS	INPUT CURRENT	OCV	PF	FREQUENCY	SOUND RATED
120V	18w	17.5w	0.27A	400VRMS	0.50	60HZ	A
MIN START TEMP	CLASS	TYPE	BALLAST FACTOR	BEF	THD(1)	NO PCB'S	
0°F	P	1 Outdoor	0.92	5.257	<110%		

PHYSICAL CHARACTERISTICS

	CASE DIMENSIONS				
	UNITS	M	L	W	H
	INCHES	5.30	5.50	1.00	1.00
	TOL (+/-)	0.05	0.05	0.05	0.05
	LEAD LENGTH				
	UNITS	BLACK	WHITE	RED	BLUE
INCHES	1×8	1×8	2×16	2×16	
TOL (+/-)	+ 3/8, - 0	+ 3/8, - 0	+ 3/8, - 0	+ 3/8, - 0	


CARTON CHARACTERISTICS

UNITS/CARTON	CARTONS/LAYER	#OF LAYER	UNITS/PALLET	PIECE WEIGHT	CARTON WEIGHT	PALLET WEIGHT
64				0.35 lbs	22.6 lbs	
CARTONS/PALLET	CARTON DIMENSIONS	PALLET DIMENSIONS	PALLET DIMENSIONS LOADED, INCLUDING WOOD PALLET			
	14.8×12.8×5.9					

PRODUCT PHOTO



ELECTRICAL DIAGRAM

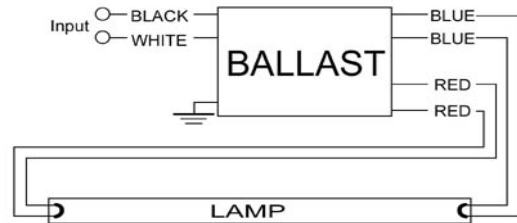

PRODUCT LABEL

<p>Ballast Wise™ ELECTRONIC BALLAST</p> <p>Cat No: DXE118M8 Type 1 Outdoor Input: 120V/60Hz Rapid Start Line Current: 0.27A Sound Rating: A Power Factor: 0.60 OC.V.: 400VRMS Start Temp: 0F-20°F Class: P Linear Lamp: 1*F18T8</p>	<p> LISTED E178694 C US 61FK</p> <p>DEXIN LIGHTING 1-866-4DEXIN8</p> <p>Ground Ballast & Mount within 3/4" of ground Metal Reflector. WARNING: Insulate unused lead(s) for 1000V. Install per National and Local Electrical Codes.</p>	<p>Input BLACK WHITE</p> <p>BALLAST</p> <p>BLUE BLUE RED RED</p> <p>LAMP</p> <p>DATE:</p>
---	---	--

