

BallastWise[®]



FLUORESCENT BALLAST SPECIFICATIONS

DESCRIPTION

CATALOG	TYPE	STARTING METHOD	NUMBER OF LAMPS	LAMP TYPE
DXE118M8S	Electronic	Rapid Start	1	F18T8, F17T8, F15T8, F13T8, F20T12, PL-13W, F13T5, F8T5

ELECTRICAL CHARACTERISTICS

INPUT VOLTAGE	LAMP WATTS	INPUT WATTS	INPUT CURRENT	OCV	PF	FREQUENCY	SOUND RATED
120V	18W, 17W, 15W, 13W, 20W, 13W, 13W, 8W	19W	0.27A	400VRMS	0.60	60HZ	A
MIN START TEMP	CLASS	TYPE	BALLAST FACTOR	BEF	THD(1)	NO PCB'S	
0° F/-18°C	P	1 Outdoor	0.92	4.842	<110%		

PHYSICAL CHARACTERISTICS

	CASE DIMENSIONS				
	UNITS	M	L	W	H
	INCHES	2.80	3.07	1.85	1.00
	TOL(+/-)	0.05	0.05	0.05	0.05
	UNITS	BLACK	WHITE	RED	BLUE
	INCHES	1×8	1×8	2×12	2×12
TOL(+/-)	+ 3/8, - 0	+ 3/8, - 0	+ 3/8, - 0	+ 3/8, - 0	


CARTON CHARACTERISTICS

UNITS/CARTON	CARTONS/LAYER	#OF LAYER	UNITS/PALLET	PIECE WEIGHT	CARTON WEIGHT	PALLET WEIGHT
CARTONS/PALLET	CARTON DIMENSIONS	PALLET DIMENSIONS	PALLET DIMENSIONS LOADED, INCLUDING WOOD PALLET			

PRODUCT PHOTO



ELECTRICAL DIAGRAM

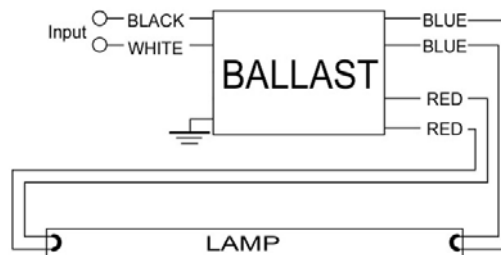

PRODUCT LABEL

Ballast Wise[™]
ELECTRONIC BALLAST
 MODEL NO. DXE118M8

WARNING:
 Insulate unused lead(s) for 1000V.
 Install per National and Local Electrical Codes.
 Ground Ballast & Mount within 34" of
 ground Metal Reflector.

DATE: _____

Input: 120V/60Hz Type 1 Outdoor
 Max. Current: 0.27A Rapid Start
 Power Factor: 0.60 Sound Rating A
 Start Temp.: 0°F-120°F O.C.V.: 400VRMS
 No PCB's Class P
 Lamp Type: 1'F18T8, 1'F17T8, 1'F15T8
 1'F13T8, 1'F20T12, 1'PL-13W
 1'F13T5, 1'F8T5

LISTED
 E178684
 61FK

DEXIN LIGHTING
 1-866-4DEXIN8

