

# BallastWise<sup>®</sup>



## FLUORESCENT BALLAST SPECIFICATIONS

### DESCRIPTION

CATALOG	TYPE	STARTING METHOD	NUMBER OF LAMPS	LAMP TYPE
DXE120M12	Electronic	Rapid Start	1	F20T12

### ELECTRICAL CHARACTERISTICS

INPUT VOLTAGE	LAMP WATTS	INPUT WATTS	INPUT CURRENT	OCV	PF	FREQUENCY	SOUND RATED
120V	20w	20w	0.29A	400VRMS	0.60	60HZ	A
MIN START TEMP	CLASS	TYPE	BALLAST FACTOR	BEF	THD(1)	NO PCB'S	
0°F	P	1 Outdoor	0.92	4.6	<110%		

### PHYSICAL CHARACTERISTICS

	CASE DIMENSIONS				
	UNITS	M	L	W	H
	INCHES	5.30	5.50	1.00	1.00
	TOL (+/-)	0.05	0.05	0.05	0.05
	LEAD LENGTH				
	UNITS	BLACK	WHITE	RED	BLUE
INCHES	1×8	1×8	2×8	2×8	
TOL (+/-)	+ 3/8, - 0	+ 3/8, - 0	+ 3/8, - 0	+ 3/8, - 0	


### CARTON CHARACTERISTICS

UNITS/CARTON	CARTONS/LAYER	#OF LAYER	UNITS/PALLET	PIECE WEIGHT	CARTON WEIGHT	PALLET WEIGHT
64				0.8 lbs	30.6 lbs	
CARTONS/PALLET	CARTON DIMENSIONS	PALLET DIMENSIONS	PALLET DIMENSIONS LOADED, INCLUDING WOOD PALLET			
	14.8×12.8×5.9					

### PRODUCT PHOTO



### ELECTRICAL DIAGRAM

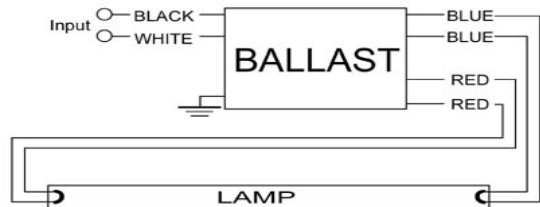

### PRODUCT LABEL

<p><b>Ballast Wise<sup>™</sup></b> ELECTRONIC BALLAST</p> <p>Cat No: DXE120M12    Type 1 Outdoor Input: 120V/60 Hz    Rapid Start Line Current: 0.29A    Sound Rating: A Power Factor: 0.60    O.C.V.: 400VRMS Start Temp: 0°F-120°F    Class: Linear Lamp: 1" F20T12</p>	<p> LISTED E17854 C US #PK</p> <p> 1-888-4DEXIN8</p> <p>Ground Ballast &amp; Mount within 3/4" of ground Metal Reflector. <b>WARNING:</b> Insulate unused lead(s) for 1000V. Install per National and Local Electrical Codes.</p>	<p>Input: BLACK, WHITE</p> <p><b>BALLAST</b></p> <p>Output: BLUE, BLUE, RED, RED</p> <p>LAMP</p> <p>DATE:</p>
---	---	---