

BallastWise[®]



FLUORESCENT BALLAST SPECIFICATIONS


DESCRIPTION

CATALOG	TYPE	STARTING METHOD	NUMBER OF LAMPS	LAMP TYPE
DXE130M8	Electronic	Rapid Start	1	F30T8, F30T12

ELECTRICAL CHARACTERISTICS

INPUT VOLTAGE	LAMP WATTS	INPUT WATTS	INPUT CURRENT	OCV	PF	FREQUENCY	SOUND RATED
120V	30W, 30W	28	Max 0.43A	400VRMS	0.6	60HZ	A
MIN START TEMP	CLASS	TYPE	BALLAST FACTOR	BEF	THD(1)	NO PCB'S	
0°F	P	10Outdoor	0.92	3.286	<110%		

PHYSICAL CHARACTERISTICS

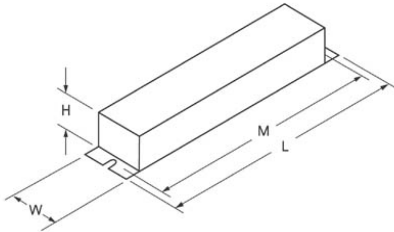

CASE DIMENSIONS				
UNITS	M	L	W	H
INCHES	7.50	7.75	1.06	1.00
TOL (+/-)	0.05	0.05	0.05	0.05
LEAD LENGTH				
UNITS	BLACK	WHITE	RED	BLUE
INCHES	1×8	1×8	2×32	2×16
TOL (+/-)	+ 3/8, - 0	+ 3/8, - 0	+ 3/8, - 0	+ 3/8, - 0


CARTON CHARACTERISTICS

UNITS/CARTON	CARTONS/LAYER	#OF LAYER	UNITS/PALLET	PIECE WEIGHT	CARTON WEIGHT	PALLET WEIGHT
30				0.8 lbs	30.6 lbs	
CARTONS/PALLET	CARTON DIMENSIONS	PALLET DIMENSIONS	PALLET DIMENSIONS LOADED, INCLUDING WOOD PALLET			
	14.8×12.8×5.9					

PRODUCT PHOTO



ELECTRICAL DIAGRAM

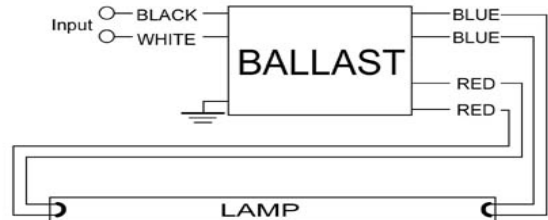

PRODUCT LABEL

Ballast Wise[™] ELECTRONIC BALLAST MODEL NO: DXE130M8	Input: 120V/60Hz Max Current: 0.43A Power Factor: >0.60 Start Temp: 0°F-120°F No PCB's Linear Lamp: 1*F30T8, 1*F30T12	Type 1 Outdoor Rapid Start Sound Rating: A O.C.V. 400VRMS Class: P	 DEXIN LIGHTING 1-866-4DEXIN8 WEST COVINA, CA 91791		Ground Ballast & Mount within 3/4" of ground Metal Reflector. WARNING: Insulate unused lead(s) for 1000V. Install per National and Local Electrical Codes. DATE:
	Ground Ballast & Mount within 3/4" of ground Metal Reflector. WARNING: Insulate unused lead(s) for 1000V. Install per National and Local Electrical Codes. DATE:				