

BallastWise[®]



FLUORESCENT BALLAST SPECIFICATIONS

DESCRIPTION

| CATALOG | TYPE | STARTING METHOD | NUMBER OF LAMPS | LAMP TYPE |
|-------------------|------------|-----------------|-----------------|-------------------------|
| DXE2H8(DXE196H81) | Electronic | Instant Start | 1 | F96T8,F96T8,F72T8,F64T6 |

| INPUT VOLTAGE | LAMP WATTS | INPUT WATTS | INPUT CURRENT | OCV | PF | FREQUENCY | SOUND RATED |
|----------------|-----------------|-------------|----------------|---------|--------|-----------|-------------|
| 120v | 59W/51W/38W/38W | 57W | Max. 0.50A | 600VRMS | >0.95 | 60HZ | A |
| MIN START TEMP | CLASS | TYPE | BALLAST FACTOR | BEF | THD(1) | NO PCB'S | |
| 0°F/-18°C | P | 1 Outdoor | 0.92 | 1.614 | <35% | | |

PHYSICAL CHARACTERISTICS

| | CASE DIMENSIONS | | | | |
|-----------|-----------------|------------|------------|------------|------|
| | UNITS | M | L | W | H |
| | INCHES | 8.90 | 9.50 | 1.70 | 1.20 |
| | TOL (+/-) | 0.05 | 0.05 | 0.05 | 0.05 |
| | LEAD LENGTH | | | | |
| | UNITS | BLACK | WHITE | RED | BLUE |
| INCHES | 1×44 | 1×44 | 1×68 | 1×44 | |
| TOL (+/-) | + 3/8, - 0 | + 3/8, - 0 | + 3/8, - 0 | + 3/8, - 0 | |


CARTON CHARACTERISTICS

| UNITS/CARTON | CARTONS/LAYER | #OF LAYER | UNITS/PALLET | PIECE WEIGHT | CARTON WEIGHT | PALLET WEIGHT |
|----------------|-------------------|-------------------|---|--------------|---------------|---------------|
| | | | | | | |
| CARTONS/PALLET | CARTON DIMENSIONS | PALLET DIMENSIONS | PALLET DIMENSIONS LOADED, INCLUDING WOOD PALLET | | | |
| | | | | | | |

PRODUCT PHOTO



ELECTRICAL DIAGRAM

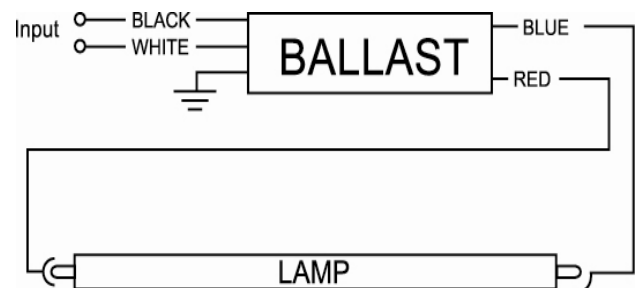

PRODUCT LABEL

| | | | |
|---|--|--|-----------|
| Ballast Wise[™] ELECTRONIC BALLAST Cat No.: DXE2H8(DXE196H81) Instant Start Type 1 Outdoor Class P Sound Rating A O.C.V.: 700VRMS Start Temp.: 0°F-120°F No PCB's Lamp Type: 1*F96T8/59W, 1*F96T8/51W 1*F72T8/38W, 1*F64T8/38W | Input: 120V 60Hz Max. Line Current: 0.50A Power Factor: 0.95 | LISTED E178684 61FK DEXIN DE LIGHTING 1-866-4DEXIN8 | DATE: |
|---|--|--|-----------|