

# BallastWise<sup>®</sup>



## FLUORESCENT BALLAST SPECIFICATIONS


### DESCRIPTION

CATALOG	TYPE	STARTING METHOD	NUMBER OF LAMPS	LAMP TYPE
DXE1H82	Electronic	Instant Start	1	F32T8, F25T8, F17T8

### ELECTRICAL CHARACTERISTICS

INPUT VOLTAGE	LAMP WATTS	INPUT WATTS	INPUT CURRENT	OCV	PF	FREQUENCY	SOUND RATED
277V	32W, 25W, 17W	29W	0.11A	580VRMS	0.98	60HZ	A
MIN START TEMP	CLASS	TYPE	BALLAST FACTOR	BEF	THD(1)	NO PCB'S	
0°F / -18°C	P	1 Outdoor	0.88	3.304	<20%		

### PHYSICAL CHARACTERISTICS

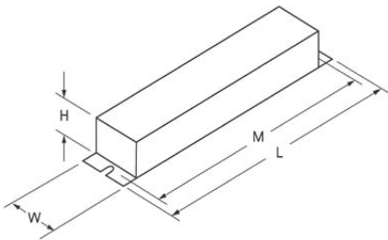


CASE DIMENSIONS				
UNITS	M	L	W	H
INCHES	8.90	9.50	1.70	1.20
TOL (+/-)	0.05	0.05	0.05	0.05
LEAD LENGTH				
UNITS	BLACK	WHITE	RED	BLUE
INCHES	1×16	1×16	1×36	1×34
TOL (+/-)	+ 3/8, - 0	+ 3/8, - 0	+ 3/8, - 0	+ 3/8, - 0


### CARTON CHARACTERISTICS

UNITS/CARTON	CARTONS/LAYER	#OF LAYER	UNITS/PALLET	PIECE WEIGHT	CARTON WEIGHT	PALLET WEIGHT
20				1.5 lbs	31.3 lbs	
CARTONS/PALLET	CARTON DIMENSIONS	PALLET DIMENSIONS	PALLET DIMENSIONS LOADED, INCLUDING WOOD PALLET			
	13.2×10.6×6.7					

### PRODUCT PHOTO

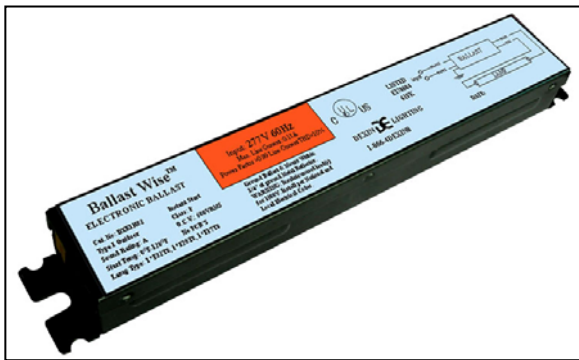

### ELECTRICAL DIAGRAM

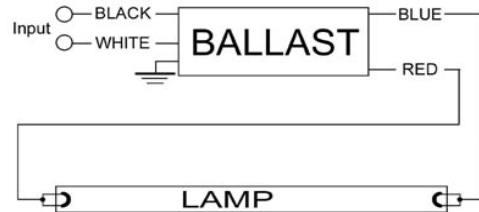

### PRODUCT LABEL

<p><b>Ballast Wise<sup>™</sup></b> ELECTRONIC BALLAST</p> <p>Cat. No: DXE1H82      Instant Start Type I Outdoor      Class: P Sound Rating: A      O.C.V.: 600VRMS Start Temp: 0°F-120°F      No PCB'S Lamp Type: 1×F32T8, 1×F25T8, 1×F17T8</p>	<p>Input: 277V 60Hz Max. Line Current: 0.11A Power Factor &gt;0.99 Line Current THD&lt;10%</p>	<p> LISTED E178684 61FK</p> <p>DEXIN  LIGHTING 1-866-4DEXIN8</p>	<p>DATE:</p>
---	--	--	--------------

