

# BallastWise<sup>®</sup>



## FLUORESCENT BALLAST SPECIFICATIONS

### DESCRIPTION

CATALOG	TYPE	STARTING METHOD	NUMBER OF LAMPS	LAMP TYPE
DXE1H8U-HBF	Electronic	Instant Start	1	F32T8, F25T8, F17T8

### ELECTRICAL CHARACTERISTICS

INPUT VOLTAGE	LAMP WATTS	INPUT WATTS	INPUT CURRENT	OCV	PF	FREQUENCY	SOUND RATED
120V-277V	32w, 25w, 17w	36w	120V Max 0.30A    277V 0.13A	580VRMS	>0.99	50/60HZ	A
MIN START TEMP	CLASS	TYPE	BALLAST FACTOR	BEF	THD(1)	NO PCB'S	
0°F	P	1 Outdoor	1.15	3.194	<10%		

### PHYSICAL CHARACTERISTICS

	CASE DIMENSIONS				
	UNITS	M	L	W	H
	INCHES	8.90	9.50	1.50	1.00
	TOL (+/-)	0.05	0.05	0.05	0.05
	LEAD LENGTH				
	UNITS	BLACK	WHITE	RED	BLUE
INCHES	1×8	1×8	1×36	1×24	
TOL (+/-)	+ 3/8, - 0	+ 3/8, - 0	+ 3/8, - 0	+ 3/8, - 0	


### CARTON CHARACTERISTICS

UNITS/CARTON	CARTONS/LAYER	#OF LAYER	UNITS/PALLET	PIECE WEIGHT	CARTON WEIGHT	PALLET WEIGHT
30				1.2 lbs	35.7 lbs	
CARTONS/PALLET	CARTON DIMENSIONS	PALLET DIMENSIONS	PALLET DIMENSIONS LOADED, INCLUDING WOOD PALLET			
	13.2×10.6×6.7					

### PRODUCT PHOTO



### ELECTRICAL DIAGRAM

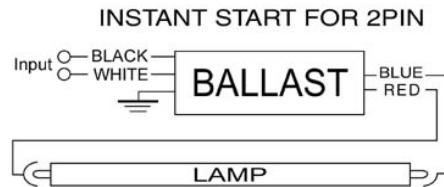

### PRODUCT LABEL

<b>Ballast Wise<sup>TM</sup></b> ELECTRONIC BALLAST Cat.No: DXE1H8U Type 1 Outdoor Sound Rating: A Start Temp: 0°F-120°F Lamp Type: 1×F32T8, 1×F25T8, 1×F17T8	Input: 120 to 277 V 50/60Hz Max. Line Current: 120V/0.30A 277V/0.13A Power Factor >0.99 Line Current THD >10% <b>High Ballast Factor</b> WARNING: Insulate unused lead(s) for 1000V. Install per National and Local Electrical Codes. Ground Ballast & Mount within 3/4" of ground Metal Reflector.	LISTED E178684 61FK DEXIN LIGHTING 1-866-4DEXIN8 • T=70°C max	 DATE:
---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	------------------------------------------------------------------------	-----------

