

BallastWise[®]



FLUORESCENT BALLAST SPECIFICATIONS

DESCRIPTION

| CATALOG | TYPE | STARTING METHOD | NUMBER OF LAMPS | LAMP TYPE |
|-------------|------------|-----------------|-----------------|---------------------|
| DXE1H8U-NBF | Electronic | Instant Start | 1 | F32T8, F25T8, F17T8 |

ELECTRICAL CHARACTERISTICS

| INPUT VOLTAGE | LAMP WATTS | INPUT WATTS | INPUT CURRENT | OCV | PF | FREQUENCY | SOUND RATED |
|----------------|---------------|-------------|------------------------------------|---------|---------|-----------|-------------|
| 120V to 277V | 32W, 25W, 17W | 28.5W | 120V Max 0.25A 277V 0.11A | 580VRMS | >0.99 | 50/60HZ | A |
| MIN START TEMP | CLASS | TYPE | BALLAST FACTOR | BEF | THD (1) | NO PCB'S | |
| 0°F / -18°C | P | 1 Outdoor | 0.88 | 3.088 | <10% | | |


PHYSICAL CHARACTERISTICS

| | CASE DIMENSIONS | | | | |
|-----------|-----------------|------------|------------|------------|------|
| | UNITS | M | L | W | H |
| | INCHES | 8.90 | 9.50 | 1.50 | 1.00 |
| | TOL (+/-) | 0.05 | 0.05 | 0.05 | 0.05 |
| | LEAD LENGTH | | | | |
| | UNITS | BLACK | WHITE | RED | BLUE |
| INCHES | 1×8 | 1×8 | 1×36 | 1×24 | |
| TOL (+/-) | + 3/8, - 0 | + 3/8, - 0 | + 3/8, - 0 | + 3/8, - 0 | |


CARTON CHARACTERISTICS

| UNITS/CARTON | CARTONS/LAYER | #OF LAYER | UNITS/PALLET | PIECE WEIGHT | CARTON WEIGHT | PALLET WEIGHT |
|----------------|-------------------|-------------------|---|--------------|---------------|---------------|
| 30 | | | | 1.36 lbs | 43.2 lbs | |
| CARTONS/PALLET | CARTON DIMENSIONS | PALLET DIMENSIONS | PALLET DIMENSIONS LOADED, INCLUDING WOOD PALLET | | | |
| | 14.7×10.3×7.8 | | | | | |

PRODUCT PHOTO

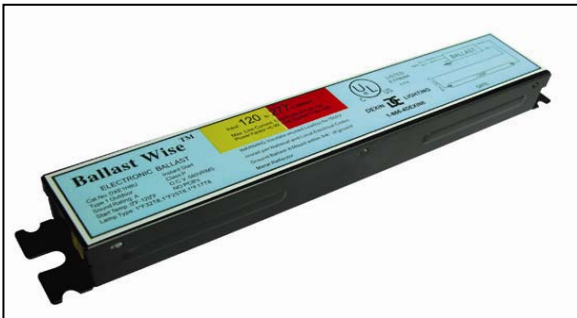

ELECTRICAL DIAGRAM

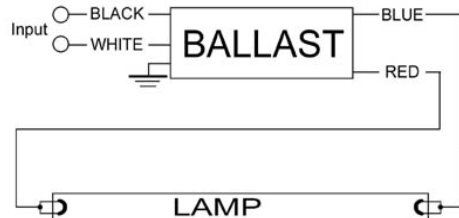

PRODUCT LABEL

| | | | |
|---|---|--------------------------------------|--|
| BallastWise[™] ELECTRONIC BALLAST Cat.No DXE1H8U Instant Start Type 1 Outdoor Class P Sound Rating: A O.C.V. 580VRMS Start Temp: 0°F-120°F NO PCB'S Lamp Type: 1*F32T8, 1*F25T8, 1*F17T8 | Input 120 to 277 V 50/60Hz Max. Line Current 120V: 0.25A, 277V: 0.11A Power Factor >0.99 Line Current THD <10% | LISTED E178684 61FK 1-866-4DEXIN8 | |
| | WARNING: Insulate unused Lead(s) for 1000V. Install per National and Local Electrical Codes. Ground Ballast & Mount within 3/4" of ground Metal Reflector. | | |