

BallastWise[®]



FLUORESCENT BALLAST SPECIFICATIONS

DESCRIPTION

CATALOG	TYPE	STARTING METHOD	NUMBER OF LAMPS	LAMP TYPE
DXE1HPL	Electronic	Instant Start	1	PL18w, PL26w, PL32w, PL42w

ELECTRICAL CHARACTERISTICS

INPUT VOLTAGE	LAMP WATTS	INPUT WATTS	INPUT CURRENT	OCV	PF	FREQUENCY	SOUND RATED
120V	42w, 32w, 26w, 18w	40w	Max 0.35A	600VRMS	0.95	60HZ	A
MIN START TEMP	CLASS	TYPE	BALLAST FACTOR	BFF	THD(1)	NO PCB'S	
0°F	P	1 Outdoor	0.92	2.30	<35%		

PHYSICAL CHARACTERISTICS

	CASE DIMENSIONS				
	UNITS	M	L	W	H
	INCHES	3.60	3.80	2.50	1.00
	TOL (+/-)	0.05	0.05	0.05	0.05
	LEAD LENGTH				
	UNITS	BLACK	WHITE	RED	BLUE
INCHES	1×16	1×16	1×24	1×24	
TOL (+/-)	+ 3/8, - 0	+ 3/8, - 0	+ 3/8, - 0	+ 3/8, - 0	


CARTON CHARACTERISTICS

UNITS/CARTON	CARTONS/LAYER	#OF LAYER	UNITS/PALLET	PIECE WEIGHT	CARTON WEIGHT	PALLET WEIGHT
30				0.7 lbs	21.2 lbs	
CARTONS/PALLET	CARTON DIMENSIONS	PALLET DIMENSIONS	PALLET DIMENSIONS LOADED, INCLUDING WOOD PALLET			
	13.2×10.6×6.7					

PRODUCT PHOTO



ELECTRICAL DIAGRAM

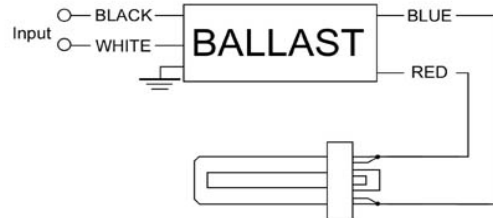

PRODUCT LABEL

Ballast WiseTM
ELECTRONIC BALLAST
MODEL NO.:DXE1HPL
Ground Ballast & Mount Within
3/4" of ground Metal Reflector.
WARNING: Insulate unused lead(s)
for 1000V. Install per National and
Local Electrical Codes.

DATE:

Input: 120V/60Hz
Max current: 0.35A
Power Factor: 0.95
Start Temp: 0°F-120°F
No PCB'S
PL Lamp: 1* 18W, 1*26W, 1* 32W, 1*42W

Type I Outdoor
Instant Start
Sound Rating: A
O.C.V.: 600VRMS
Class: P

LISTED
E178684
61FK

DEXIN DE LIGHTING
1-866-4DEXIN8