

BallastWise®



FLUORESCENT BALLAST SPECIFICATIONS

DESCRIPTION

CATALOG	TYPE	STARTING METHOD	NUMBER OF LAMPS	LAMP TYPE
DXE132M8	Electronic	Rapid Start	1	F32T8,F25T8,F17T8,F32T8/U,F40T12

ELECTRICAL CHARACTERISTICS

INPUT VOLTAGE	LAMP WATTS	INPUT WATTS	INPUT CURRENT	OCV	PF	FREQUENCY	SOUND RATED
120V	32/25/17/31/25W	32w	0.45A	400VRMS	>0.60	60HZ	A
MIN START TEMP	CLASS	TYPE	BALLAST FACTOR	BEF	THD(1)	NO PCB'S	
0°F / - 18°C	P	1Outdoor	0.92	2.875	<110%		

PHYSICAL CHARACTERISTICS

	CASE DIMENSIONS				
	UNITS	M	L	W	H
	INCHES	8.9	9.5	1.0	1.0
	TOL (+/-)	0.050	0.050	0.050	0.050
	LEAD LENGTH				
	UNITS	BLACK	WHITE	RED	BLUE
INCHES	1×8	1×8	2×44	2×16	
TOL (+/-)	+ 3/8, - 0	+ 3/8, - 0	+ 3/8, - 0	+ 3/8, - 0	


CARTON CHARACTERISTICS

UNITS/CARTON	CARTONS/LAYER	#OF LAYER	UNITS/PALLET	PIECE WEIGHT	CARTON WEIGHT	PALLET WEIGHT
35				0.8 lbs	30.6 lbs	
CARTONS/PALLET	CARTON DIMENSIONS	PALLET DIMENSIONS	PALLET DIMENSIONS LOADED, INCLUDING WOOD PALLET			
	13.2×10.6×6.7					

PRODUCT PHOTO



ELECTRICAL DIAGRAM

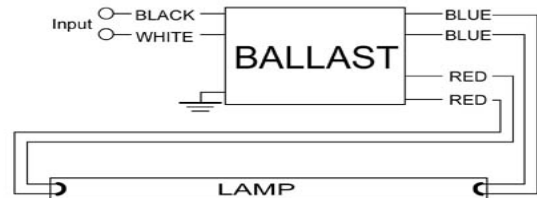

PRODUCT LABEL

	Ballast Wise™ ELECTRONIC BALLAST MODEL NO: DXE132M8	Input:120V/60Hz Max Current:0.45A Power Factor:>0.60 Start Temp:0°F-120°F No PCB's Linear Lamp:1°F17T8,1°F25T8,1°F32T8	Type 1 Outdoor Rapid Start Sound Rating:A O.C.V.:400VRMS Class:P	LISTED E178694 		Ground Ballast & Mount within 3/4" of ground Metal Reflector. WARNING: Insulate unused lead(s) for 1000V. Install per National and Local Electrical Codes. DATE:
	1-888-4DEXIN6 WEST COVINA CA#1781					

