

# BallastWise<sup>®</sup>



## FLUORESCENT BALLAST SPECIFICATIONS

### DESCRIPTION

CATALOG	TYPE	STARTING METHOD	NUMBER OF LAMPS	LAMP TYPE
DXE213MPL	Electronic	Instant Start	2	PL13w, PL9w, PL7w, PL5w

### ELECTRICAL CHARACTERISTICS

INPUT VOLTAGE	LAMP WATTS	INPUT WATTS	INPUT CURRENT	OCV	PF	FREQUENCY	SOUND RATED
120V	13w, 9w, 7w, 5w	28w	Max 0.42A	750VRMS	0.60	60HZ	A
MIN START TEMP	CLASS	TYPE	BALLAST FACTOR	BEF	THD(1)	NO PCB'S	
0°F	P	1 Outdoor	0.92	3.285	<110%		

### PHYSICAL CHARACTERISTICS

	CASE DIMENSIONS				
	UNITS	M	L	W	H
	INCHES	3.16	3.36	1.85	1.00
	TOL (+/-)	0.05	0.05	0.05	0.05
	LEAD LENGTH				
	UNITS	BLACK	WHITE	RED	BLUE
INCHES	1×8	1×8	1×12	2×12	
TOL (+/-)	+ 3/8, - 0	+ 3/8, - 0	+ 3/8, - 0	+ 3/8, - 0	


### CARTON CHARACTERISTICS

UNITS/CARTON	CARTONS/LAYER	#OF LAYER	UNITS/PALLET	PIECE WEIGHT	CARTON WEIGHT	PALLET WEIGHT
56				0.3 lbs	18.6 lbs	
CARTONS/PALLET	CARTON DIMENSIONS	PALLET DIMENSIONS	PALLET DIMENSIONS LOADED, INCLUDING WOOD PALLET			
	14.2×12.2×5.3					

### PRODUCT PHOTO



### ELECTRICAL DIAGRAM

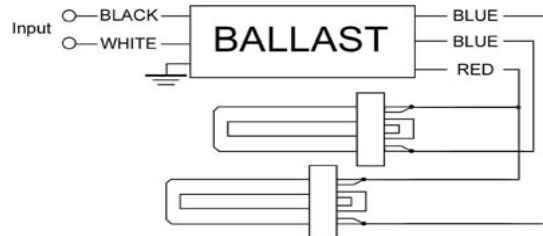

### PRODUCT LABEL

<p><b>Ballast Wise<sup>TM</sup></b>  <b>ELECTRONIC BALLAST</b>  <b>MODEL NO.: DXE213MPL</b>          Ground Ballast &amp; Mount Within          3/4" of ground Metal Reflector.  <b>WARNING:</b> Insulate unused lead(s)          for 1000V. Install per National and          Local Electrical Codes.</p>	<p>DATE:</p>
<p>Input: 120V/60Hz          Max. current: 0.42A          Power Factor: 0.60          Start Temp: 0°F-120°F          No PCB'S          PL Lamp: 2×13W, 2×9W, 2×7W, 2×5W</p>	<p>Type I Outdoor          Instant Start          Sound Rating: A          O.C.V.: 750 VRMS          Class: P</p>
LISTED E178684 61FK <b>DEXIN DE LIGHTING</b> 1-866-4DEXIN8	