

BallastWise[®]



FLUORESCENT BALLAST SPECIFICATIONS

DESCRIPTION

CATALOG	TYPE	STARTING METHOD	NUMBER OF LAMPS	LAMP TYPE
DXE220M12	Electronic	Instant Start	2	F20T12

ELECTRICAL CHARACTERISTICS

INPUT VOLTAGE	LAMP WATTS	INPUT WATTS	INPUT CURRENT	OCV	PF	FREQUENCY	SOUND RATED
120V	20w	41w	Max. 0.57A	400VRMS	0.60	60HZ	A
MIN START TEMP	CLASS	TYPE	BALLAST FACTOR	BEF	THD(1)	NO PCB'S	
0°F / - 18°C	P	1 Outdoor	0.92	2.244	<120%		

PHYSICAL CHARACTERISTICS

	CASE DIMENSIONS				
	UNITS	M	L	W	H
	INCHES	5.30	5.50	1.70	1.00
	TOL (+/-)	0.05	0.05	0.05	0.05
	LEAD LENGTH				
	UNITS	BLACK	WHITE	RED	BLUE
INCHES	1×12	1×12	1×24	2×16	
TOL (+/-)	+ 3/8, - 0	+ 3/8, - 0	+ 3/8, - 0	+ 3/8, - 0	


CARTON CHARACTERISTICS

UNITS/CARTON	CARTONS/LAYER	#OF LAYER	UNITS/PALLET	PIECE WEIGHT	CARTON WEIGHT	PALLET WEIGHT
60	12	5		0.7 lbs	42.51bs	
CARTONS MODEL	CARTON DIMENSIONS	PALLET DIMENSIONS		PALLET DIMENSIONS LOADED, INCLUDING WOOD PALLET		
P2	14.4×12.83×5.6					

PRODUCT PHOTO



ELECTRICAL DIAGRAM

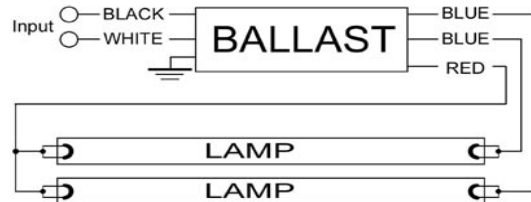

PRODUCT LABEL

Ballast WiseTM

ELECTRONIC BALLAST


Cat.No:DXE2M12 Type 1 Outdoor
 Input:120V/60Hz Rapid Start
 Max. Current:0.57A Sound Rating:A
 Power Factor:0.60 O.C.V.:600VRMS
 Start Temp:0°F~120°F Class:P
 Linear Lamp:2*F20T12



LISTED
E178684
US 61FK

DEXIN LIGHTING

1-866-4DEXIN8
COVINA CA91722

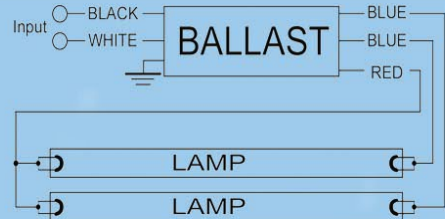

WARNING:
 Insulate unused lead(s) for 1000V.
 Install per National and Local Electrical Codes.
 Ground Ballast & Mount within 3/4" of
 ground Metal Reflector.

DATE: