

# BallastWise<sup>®</sup>

®



## FLUORESCENT BALLAST SPECIFICATIONS

### DESCRIPTION

CATALOG	TYPE	STARTING METHOD	NUMBER OF LAMPS	LAMP TYPE
DXE2M8(DXE226MPL)	Electronic	Rapid Start	2	PL26w, PL18w

### ELECTRICAL CHARACTERISTICS

INPUT VOLTAGE	LAMP WATTS	INPUT WATTS	INPUT CURRENT	OCV	PF	FREQUENCY	SOUND RATED
120V	26w, 18w	55w	0.77A	400VRMS	0.60	60HZ	A
MIN START TEMP	CLASS	TYPE	BALLAST FACTOR	BEF	THD(1)	NO PCB'S	
0°F	P	1 Outdoor	1.0	1.818	<110%		

### PHYSICAL CHARACTERISTICS

	CASE DIMENSIONS					
	UNITS	M	L	W	H	
	INCHES	4.56	4.95	2.37	1.00	
	TOL (+/-)	0.05	0.05	0.05	0.05	
	LEAD LENGTH					
UNITS	BLACK	WHITE	RED	BLUE	YELLOW	BROWN
INCHES	1×8	1×8	2×12	2×12	2×12	2×12
TOL (+/-)	+ 3/8, - 0	+ 3/8, - 0	+ 3/8, - 0	+ 3/8, - 0	+ 3/8, - 0	+ 3/8, - 0


### CARTON CHARACTERISTICS

UNITS/CARTON	CARTONS/LAYER	#OF LAYER	UNITS/PALLET	PIECE WEIGHT	CARTON WEIGHT	PALLET WEIGHT
20				1.5 lbs	35.7 lbs	
CARTONS/PALLET	CARTON DIMENSIONS	PALLET DIMENSIONS	PALLET DIMENSIONS LOADED, INCLUDING WOOD PALLET			
	12.6×10.1×6.1					

### PRODUCT PHOTO



### ELECTRICAL DIAGRAM

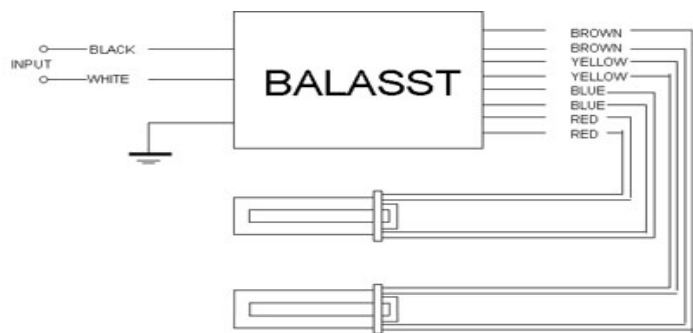

### PRODUCT LABEL

<p><b>Ballast Wise<sup>™</sup></b> ELECTRONIC BALLAST</p> <p>Cat No: DXE2M8(DXE226MPL) Rapid Start Type 1 Outdoor Class: P Sound Rating: A O.C.V.: 400VRMS Start Temp: 0°F-12°F NO PCB'S Lamp Type: 2*26WPL, 2*18WPL</p>	<p>Input: 120V 60Hz Max. Line Current: 0.77A Power Factor: 0.60</p>
	<p>Ground Ballast &amp; Mount within 3/4" of ground Metal Reflector. WARNING: Insulate unused lead(s) for 1000V. Install per National and Local Electrical Codes.</p>
<p>DATE:</p>	<p>LISTED E178684 61FK</p> <p>DEXIN  LIGHTING</p> <p>1-866-4DEXIN8 COVINA CA 91722</p>

