

# BallastWise®



## FLUORESCENT BALLAST SPECIFICATIONS

### DESCRIPTION

CATALOG	TYPE	STARTING METHOD	NUMBER OF LAMPS	LAMP TYPE
DXE4H8(DXE254HO5)	Electronic	Instant Start	2	F54T5HO

### ELECTRICAL CHARACTERISTICS

INPUT VOLTAGE	LAMP WATTS	INPUT WATTS	INPUT CURRENT	OCV	PF	FREQUENCY	SOUND RATED
120V	54W	108W	1.01A	600VRMS	0.95	60HZ	A
MIN START TEMP	CLASS	TYPE	BALLAST FACTOR	BEF	THD(1)	NO PCB'S	
0°F	P	10outdoor	0.92	0.852	<35%		

### PHYSICAL CHARACTERISTICS

	CASE DIMENSIONS				
	UNITS	M	L	W	H
	INCHES	13.75	14.25	1.10	1.00
	TOL (+/-)	0.05	0.05	0.05	0.05
	LEAD LENGTH				
	UNITS	BLACK	WHITE	RED	BLUE
INCHES	1×16	1×16	1×36	2×24	
TOL (+/-)	+ 3/8, - 0	+ 3/8, - 0	+ 3/8, - 0	+ 3/8, - 0	


### CARTON CHARACTERISTICS

UNITS/CARTON	CARTONS/LAYER	#OF LAYER	UNITS/PALLET	PIECE WEIGHT	CARTON WEIGHT	PALLET WEIGHT
32				1.4 lbs	21.0 lbs	
CARTONS/PALLET	CARTON DIMENSIONS	PALLET DIMENSIONS	PALLET DIMENSIONS LOADED, INCLUDING WOOD PALLET			
	14.9×12.8×6.6					

### PRODUCT PHOTO



### ELECTRICAL DIAGRAM

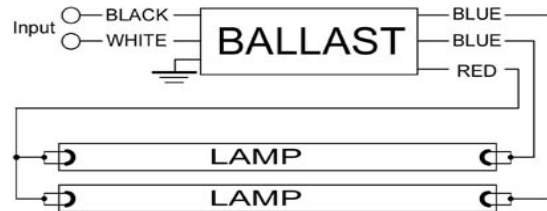

### PRODUCT LABEL

<b>Ballast Wise™</b> ELECTRONIC BALLAST MODEL NO.: DXE4H8(DXE254HO5)	Input: 120V/60Hz Max Current: 1.01A Power Factor: 0.95 Start Temp: 0°F-120°F No PCB's Linear Lamp: 4" F32T8, 2" F54T5HO	Type 1 Outdoor Instant Start Sound Rating: A O.C.V.: 600VRMS Class P	  1-888-4DEXIN8		<b>WARNING:</b> Insulate unused lead(s) for 1000V. Install per National and Local Electrical Codes. Ground Ballast & Mount within 3/4" of ground Metal Reflector. DATE:
	Te: 70°C max				

