

BallastWise®



FLUORESCENT BALLAST SPECIFICATIONS

DESCRIPTION

CATALOG	TYPE	STARTING METHOD	NUMBER OF LAMPS	LAMP TYPE
DXE272VHO121	Electronic	Instant Start	2	F72T12VHO, F59T12VHO

ELECTRICAL CHARACTERISTICS

INPUT VOLTAGE	LAMP WATTS	INPUT WATTS	INPUT CURRENT	OCV	PF	FREQUENCY	SOUND RATED
120V	165W, 140W	319W	2.80A	600VRMS	0.95	60HZ	A
MIN START TEMP	CLASS	TYPE	BALLAST FACTOR	BEF	THD(1)	NO PCB'S	
0°F / -18°C	P	1 Outdoor	0.92	0.288	<35%		


PHYSICAL CHARACTERISTICS

	CASE DIMENSIONS						
	UNITS	M	X	L	W	H	
	INCHES	13.40	1.25	14.00	2.00	1.60	
	TOL (+/-)	0.05	0.05	0.05	0.05	0.05	
	LEAD LENGTH						
	UNITS	BLACK	WHITE	RED	BLUE	YELLOW	BROWN
INCHES	1×18	1×18	1×68	1×36	1×68	1×36	
TOL (+/-)	+3/8, -0	+3/8, -0	+3/8, -0	+3/8, -0	+3/8, -0	+3/8, -0	


CARTON CHARACTERISTICS

UNITS/CARTON	CARTONS/LAYER	#OF LAYER	UNITS/PALLET	PIECE WEIGHT	CARTON WEIGHT	PALLET WEIGHT
12						
CARTONS/PALLET	CARTON DIMENSIONS	PALLET DIMENSIONS		PALLET DIMENSIONS LOADED, INCLUDING WOOD PALLET		
	14.96×11.22×5.91					

PRODUCT PHOTO

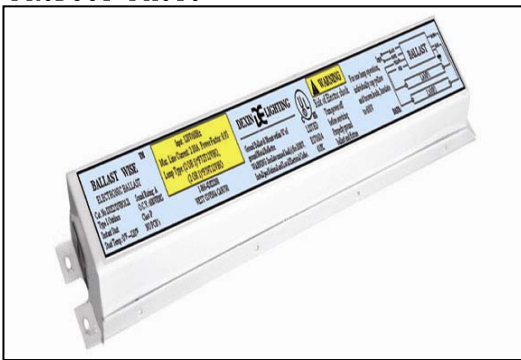

ELECTRICAL DIAGRAM

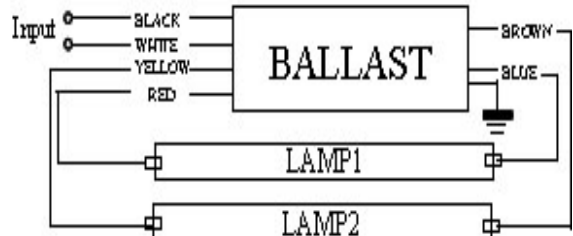

PRODUCT LABEL

BALLAST WISE™ ELECTRONIC BALLAST Cat. No. DXE272VHO121 Type 1 Outdoor Instant Start Start Temp: 0°F -120°F	Input: 120V/60Hz Max. Line Current: 2.80A Power Factor: 0.95 Lamp Type: (2 OR 1)*F72T12VHO, (2 OR 1)*F59T12VHO 1-866-4DEXINS WEST COVINA CA91791	DEXIN DE LIGHTING Ground Ballast & Mount within 3/4" of ground Metal Reflector. WARNING: Insulate unused lead(s) for 1000V. Inst all per National and Local Electrical Codes.	E178684 61FK	WARNING Risk of Electric shock Turn power off before servicing Properly ground ballast and fixture	For one lamp operation, individually cap yellow and brown leads, insulate to 600V DATE:	
--	---	---	-----------------	--	--	--

