

BallastWise[®]



FLUORESCENT BALLAST SPECIFICATIONS

DESCRIPTION

CATALOG	TYPE	STARTING METHOD	NUMBER OF LAMPS	LAMP TYPE
DXE296H122	Electronic	Instant Start	2	F96T12/75W, F96T12/60W, F84T12, F72T12, F64T12, F60T12

INPUT VOLTAGE	LAMP WATTS	INPUT WATTS	INPUT CURRENT	OCV	PF	FREQUENCY	SOUND RATED
277v	75W/60W/70W 55W/52W/50W	135W	1.18A	600VRMS	0.95	60HZ	A
MIN START TEMP	CLASS	TYPE	BALLAST FACTOR	BEF	THD(1)	NO PCB'S	
0°F / - 18°C	P	1Outdoor	0.92	0.672	<30%		

PHYSICAL CHARACTERISTICS

	CASE DIMENSIONS					
	UNITS	M	X	L	W	H
	INCHES	8.90	1.25	9.50	2.38	1.57
	TOL(+/-)	0.05	0.05	0.05	0.05	0.05
	LEAD LENGTH					
	UNITS	BLACK	WHITE	RED	BLUE	BLUE
INCHES	1×18	1×18	1×68	2×44		
TOL(+/-)	+ 3/8, - 0	+ 3/8, - 0	+ 3/8, - 0	+ 3/8, - 0	+ 3/8, - 0	


CARTON CHARACTERISTICS

UNITS/CARTON	CARTONS/LAYER	#OF LAYER	UNITS/PALLET	PIECE WEIGHT	CARTON WEIGHT	PALLET WEIGHT
12				2.03 lbs	26.46 lbs	
CARTONS/PALLET	CARTON DIMENSIONS	PALLET DIMENSIONS	PALLET DIMENSIONS LOADED, INCLUDING WOOD PALLET			
	12.6×10.1×6.1					

PRODUCT PHOTO



ELECTRICAL DIAGRAM

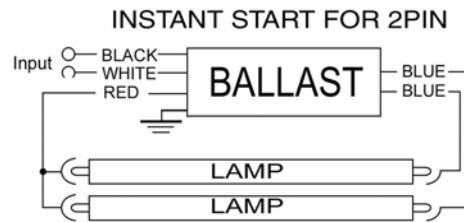

PRODUCT LABEL

Ballast Wise[™] ELECTRONIC BALLAST Cat.No: DXE296H122 Instant Start Type 1 Outdoor Class:P Sound Rating: A O.C.V.: 600VRMS Start Temp: 0°F-120°F No PCB'S Lamp Type: 2*F96T12/75W,2*F96T12/60W,2*F84T12/70W 2*F72T12/55W,2*F64T12/52W,2*F60T12/50W	Input: 277V 60Hz Max Line Current 0.52A Power Factor 0.95 Line current THD<10%	 LISTED E178684 61FK DEXIN LIGHTING 1-866-4DEXIN8 COVINA CA91722	 DATE:
	WARNING: Insulate unused lead(s) for 1000V. Install per National and Local Electrical Codes. Ground Ballast & Mount within 3/4" of ground Metal Reflector.		

