

BallastWise®



FLUORESCENT BALLAST SPECIFICATIONS


DESCRIPTION

CATALOG NO.	TYPE	STARTING METHOD	NUMBER OF LAMPS	LAMP TYPE
DXE4H8U(DXE296H8U)	Electronic	Instant Start	1 or 2	F96T8

ELECTRICAL CHARACTERISTICS


INPUT VOLTAGE	REQUENCY	LAMP WATTS	INPUT WATTS	INPUT CURRENT	THD	PF	SOUND RATED A	
120V to 277V	50 / 60Hz	59W	112W	0.96A / 0.41A	<10%	>0.99		
MIN START TEMP	Class P	TYPE 1 Outdoor	BALLAST FACTOR		BEF	O.C.V.	BALLAST FREQUENCY	NO PCB'S
0°F ~ -18°C			0.88	0.785	600VRMS	>40kHz		

PHYSICAL CHARACTERISTICS

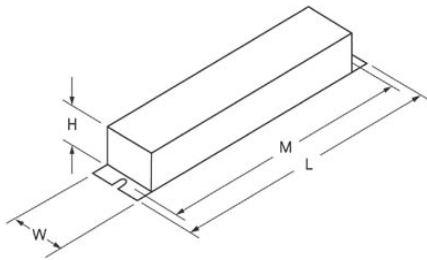

CASE DIMENSIONS				
UNITS	M	L	W	H
INCHES	8.90	9.50	1.70	1.20
TOL(+/-)	0.05	0.05	0.05	0.05
LEAD LENGTH				
UNITS	BLACK	WHITE	RED	BLUE
INCHES	1x44	1x44	1x68	2x44
TOL(+/-)	+3/8,-0	+3/8,-0	+3/8,-0	+3/8,-0

PRODUCT PHOTO

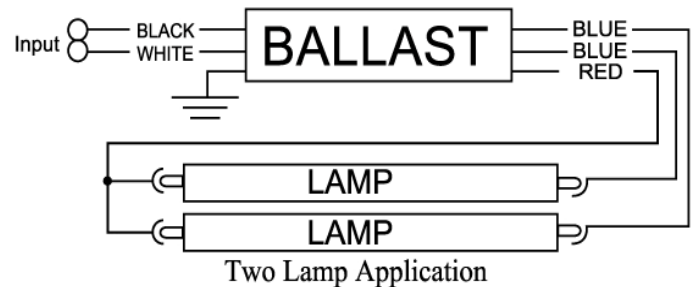

PRODUCT LABEL

<p>BallastWise™ ELECTRONIC BALLAST</p> <p>Cat.No.: DXE4H8U(DXE296H8U) Type 1 Outdoor Sound Rating A Start Temp.: 0°F~120°F Lamp Type: 1 or 2*F96T8</p>	<p>Input: 120 to 277 V 50/60Hz Max. Line Current: 120v/0.96A 277v/0.41A Power Factor>0.99 Line Current THD<10%</p>	<p>DuroPower 1-866-433-9468</p> <p>UL US LISTED E178684 61FK</p>	<p>WARNING: Insulate unused lead(s) for 1000V. Install per National and Local Electrical Codes. Ground Ballast & Mount within 3/4" of ground Metal Reflector.</p> <p>DATE:</p>
---	--	--	--