

# BallastWise<sup>®</sup>



## FLUORESCENT BALLAST SPECIFICATIONS

### DESCRIPTION

CATALOG	TYPE	STARTING METHOD	NUMBER OF LAMPS	LAMP TYPE
DXE296HO82	Electronic	Instant Start	2 or 1	F96T8HO

### ELECTRICAL CHARACTERISTICS

INPUT VOLTAGE	LAMP WATTS	INPUT WATTS	INPUT CURRENT	OCV	PF	FREQUENCY	SOUND RATED
120V	86W	180W	0.68A	600VRMS	0.95	60HZ	A
MIN START TEMP	CLASS	TYPE	BALLAST FACTOR	BEF	THD(1)	NO PCB'S	
0°F / - 18°C	P	1 Outdoor	0.92	0.511	<35%		

### PHYSICAL CHARACTERISTICS

	CASE DIMENSIONS				
	UNITS	M	L	W	H
	INCHES	8.90	9.50	2.38	1.60
	TOL (+/-)	0.05	0.05	0.05	0.05
	LEAD LENGTH				
	UNITS	BLACK	WHITE	RED	BLUE
INCHES	1×18	1×18	1×68	2×44	
TOL (+/-)	+ 3/8, - 0	+ 3/8, - 0	+ 3/8, - 0	+ 3/8, - 0	


### CARTON CHARACTERISTICS

UNITS/CARTON	CARTONS/LAYER	#OF LAYER	UNITS/PALLET	PIECE WEIGHT	CARTON WEIGHT	PALLET WEIGHT
12				2.03 lbs	26.46 lbs	
CARTONS/PALLET	CARTON DIMENSIONS	PALLET DIMENSIONS	PALLET DIMENSIONS LOADED, INCLUDING WOOD PALLET			
	13.2×10.6×6.7					

### PRODUCT PHOTO



### ELECTRICAL DIAGRAM

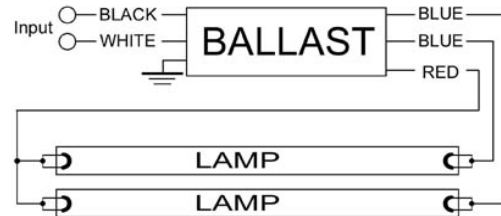

### PRODUCT LABEL

<b>Ballast Wise<sup>™</sup></b> <b>ELECTRONIC BALLAST</b> Cat.No: DXE296HO82 Type 1 Outdoor Sound Rating: A Start Temp: 0°F-120°F Lamp Type: 2'F96T8HO, 1'F96T8HO	Instant Start Class: P O.C.V.: 600VRMS No PCB'S	Input: 277V60Hz Max Line Current: 0.68A Power Factor: 0.92 <b>WARNING:</b> Insulate unused lead(s) for 1000V. Install per National and Local Electrical Codes. Ground Ballast & Mount within 3/4" of ground Metal Reflector.	LISTED E178684 61FK <b>DEXIN LIGHTING</b> 1-866-4DEXIN8 COVINA CA91722	
---	--	--	---	--

