

BallastWise



FLUORESCENT BALLAST SPECIFICATIONS 0-10V Electronic Dimming Ballast


DESCRIPTION

CATALOG	TYPE	STARTING METHOD	DIMMING METHOD	NUMBER OF LAMPS	LAMP TYPE
DXE2H5UD	ELECTRONIC	Program Rapid Start	0-10V	2	F28T5


ELECTRICAL CHARACTERISTICS

INPUT VOLTAGE	LAMP WATTS	INPUT WATTS	INPUT CURRENT	SOUND RATED	FREQUENCY	OCV		
120V to 277V	28W	63W/13W	0.53~0.11A	A	50/60HZ	300VRMS		
MIN START TEMP	BALLAST FACTOR	CLASS	TYPE	PF	BEF	DIMMING RANGE	THD	NO PCB'S
50° F~120° F	1.0	P	1 Outdoor	>0.99	1.58	100%~2%	<10%	


PHYSICAL CHARACTERISTICS

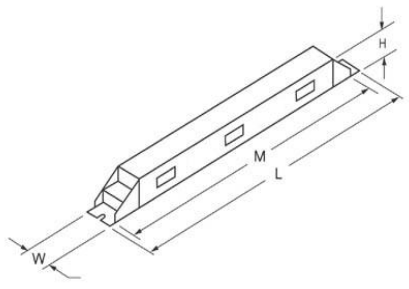	CASE DIMENSIONS					
	UNITS	M	L	W	H	
	INCHES	16.2	16.88	1.50	1.00	
	TOL (+/-)	0.05	0.05	0.05	0.05	
CONNECTOR WIRETRIP						
BLACK/WHITE	GREEN	PURPLE	GRAY	RED/BLUE	YELLOW	BROWN
1	1	1	1	2	2	1

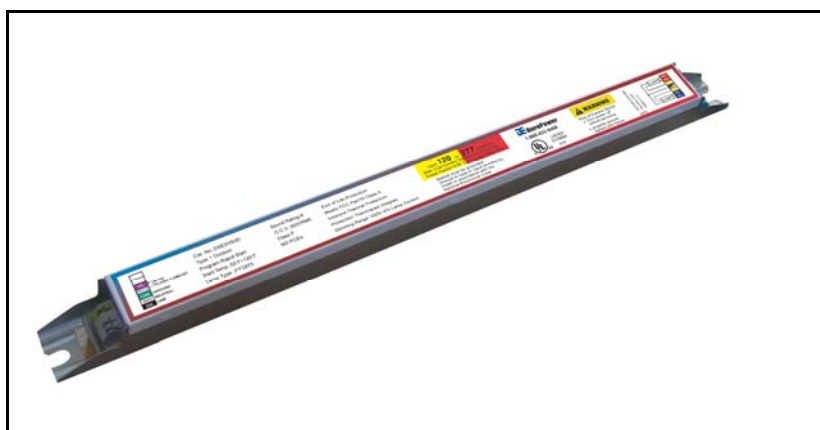



PRODUCT PHOTO

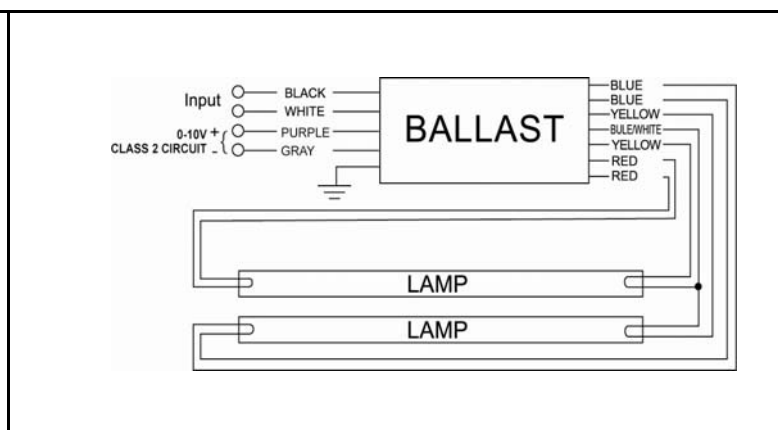

ELECTRICAL DIAGRAM



PRODUCT LABEL

	Cat. No. :DXE2H5UD Type 1 Outdoor Program Rapid Start Start Temp :50 F~120 F Lamp Type: 2'F28T5	Sound Rating A O.C.V.:300VRMS Class P NO PCB's	End of Life Protection Meets FCC Part18 Class A Inherent Thermal Protection Protection Thermiques Integree Dimming Range 100%~2% Lamp Current	Input: 120 to 277 V 50/60Hz Max. Line Current 120V@0.53A,277V@0.11A Power Factor>0.99 L Line Current THD<10%	 1-866-433-9468  LISTED E178684 C US 61PK	 WARNING Risk of Electric Shock • Turn power off before servicing • properly ground ballast and fixture	DATE: _____ DRAWN BY: _____ CHECKED BY: _____ DATE: _____
---	---	---	---	--	--	--	--