

BallastWise[®]



FLUORESCENT BALLAST SPECIFICATIONS

DESCRIPTION

CATALOG	TYPE	STARTING METHOD	NUMBER OF LAMPS	LAMP TYPE
DXE2H8	Electronic	Instant Start	2	F32T8, F25T8, F17T8, F40T12, F34T12, F30T8, F18T8, F15T8

ELECTRICAL CHARACTERISTICS

INPUT VOLTAGE	LAMP WATTS	INPUT CURRENT	INPUT WATTS	OCV	FREQUENCY	SOUND RATED	
120V	32w, 25w, 17w, 34w, 40w, 30w, 18w, 15w	Max 0.56A	58.5w	600VRMS	60HZ	A	
MIN START TEMP	CLASS	TYPE	BALLAST FACTOR	PF	BEF	THD(1)	NO PCB'S
-20°F / -28.8°F	P	1Outdoor	0.92	0.95	1.57	<30%	

PHYSICAL CHARACTERISTICS

	CASE DIMENSIONS				
	UNITS	M	L	W	H
	INCHES	8.90	9.50	1.50	1.00
	TOL (+/-)	0.05	0.50	0.50	0.50
	LEAD LENGTH				
	UNITS	BLACK	WHITE	GREEN	RED
INCHES	1×16	1×16	1×8	1×36	2×24
TOL (+/-)	+3/8, -0	+3/8, -0	+3/8, -0	+3/8, -0	+3/8, -0


CARTON CHARACTERISTICS

UNITS/CARTON	CARTONS/LAYER	#OF LAYER	UNITS/PALLET	PIECE WEIGHT	CARTON WEIGHT	PALLET WEIGHT
30				1.15 lbs	35.7 lbs	
CARTONS/PALLET	CARTON DIMENSIONS	PALLET DIMENSIONS	PALLET DIMENSIONS LOADED, INCLUDING WOOD PALLET			
	12.6×10.1×6.1					

PRODUCT PHOTO



ELECTRICAL DIAGRAM

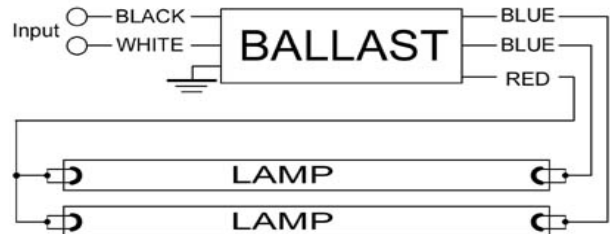

PRODUCT LABEL

<h2>Ballast Wise[™]</h2> <p>ELECTRONIC BALLAST</p> <p>Cat.No: DXE2H8 Type 1 Outdoor Sound Rating: A Start Temp: -20°F-120°F Lamp Type: 2*F32T8, 2*F25T8, 2*F17T8, 2*F25T12, 2*34T12, 2*F40T12, 2*F30T8, 2*F18T8, 2*F15T8</p>	<p>Instant Start Class:P O.C.V.:600VRMS No PCB'S</p>	<p>Input: 120V 60Hz Max. Line Current: 0.56A Power Factor: 0.95</p>	<p>WARNING: Insulate unused lead(s) for 1000V. Install per National and Local Electrical Codes. Ground Ballast & Mount with in 3/4" of ground Metal Reflector.</p>	LISTED E178684 61FK	<p>1-866-4DEXIN8 COVINA CA91722</p>		DATE:

