

BallastWise[®]



FLUORESCENT BALLAST SPECIFICATIONS


DESCRIPTION

CATALOG	TYPE	STARTING METHOD	NUMBER OF LAMPS	LAMP TYPE
DXE2HPL	Electronic	Instant Start	2	PL18w, PL26w, PL32w, PL42w

ELECTRICAL CHARACTERISTICS

INPUT VOLTAGE	LAMP WATTS	INPUT WATTS	INPUT CURRENT	OCV	PF	FREQUENCY	SOUND RATED
120V	42w, 32w, 26w, 18w	80w	Max 0.70A	600VRMS	0.95	60HZ	A
MIN START TEMP	CLASS	TYPE	BALLAST FACTOR	BEF	THD(1)	NO PCB'S	
0°F	P	1 Outdoor	0.92	1.15	<35%		

PHYSICAL CHARACTERISTICS

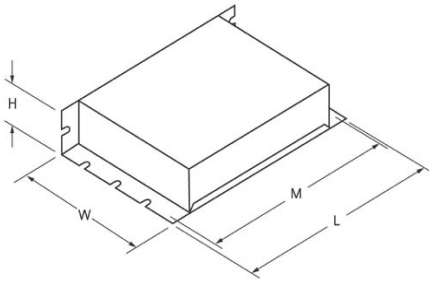

CASE DIMENSIONS

UNITS	M	L	W	H
INCHES	3.60	3.80	3.10	1.00
TOL (+/-)	0.05	0.05	0.05	0.05

LEAD LENGTH

UNITS	BLACK	WHITE	RED	BLUE
INCHES	1×16	1×16	1×36	2×24
TOL (+/-)	+ 3/8, - 0	+ 3/8, - 0	+ 3/8, - 0	+ 3/8, - 0


CARTON CHARACTERISTICS

UNITS/CARTON	CARTONS/LAYER	#OF LAYER	UNITS/PALLET	PIECE WEIGHT	CARTON WEIGHT	PALLET WEIGHT
30				0.7 lbs	21.2 lbs	
CARTONS/PALLET	CARTON DIMENSIONS	PALLET DIMENSIONS	PALLET DIMENSIONS LOADED, INCLUDING WOOD PALLET			
	13.2×10.6×6.7					

PRODUCT PHOTO



ELECTRICAL DIAGRAM

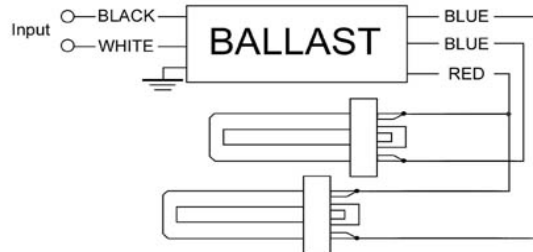

PRODUCT LABEL

<p>Ballast WiseTM ELECTRONIC BALLAST MODEL NO.:DXE2HPL Ground Ballast & Mount Within 3/4" of ground Metal Reflector. WARNING: Insulate unused lead(s) for 1000V. Install per National and Local Electrical Codes.</p>		<p>DATE:</p>	
<p>Input: 120V/60Hz Max current: 0.7A Power Factor: 0.95 Start Temp: 0°F-120°F No PCB'S PL Lamp: 2* 18W, 2* 26W, 2* 32W, 2* 42W</p>	<p>Type I Outdoor Instant Start Sound Rating: A O.C.V.: 600 VRMS Class: P</p>	<p>LISTED E178684 61FK DEXIN DE LIGHTING 1-866-4DEXIN8</p>	