

BallastWise®



FLUORESCENT BALLAST SPECIFICATIONS

DESCRIPTION

CATALOG	TYPE	STARTING METHOD	NUMBER OF LAMPS	LAMP TYPE
DXE2M5	Electronic	Rapid Start	2	F13T5, F8T5, F13T5+F8T5

ELECTRICAL CHARACTERISTICS

INPUT VOLTAGE	LAMP WATTS	INPUT WATTS	INPUT CURRENT	OCV	PF	FREQUENCY	SOUND RATED
120V	29.0W, 19.0W, 23.5W	27.72W	0.40A	400VRMS	0.60	60HZ	A
MIN START TEMP	CLASS	TYPE	BALLAST FACTOR	BEF	THD (1)	NO PCB'S	
0°F / - 18°C	P	10outdoor	0.92	3.319	<110%		

PHYSICAL CHARACTERISTICS

	CASE DIMENSIONS					
	UNITS	M	L	W	H	
	INCHES	5.30	5.50	1.70	1.00	
	TOL (+/-)	0.05	0.05	0.05	0.05	
	LEAD LENGTH					
UNITS	BLACK	WHITE	RED	BLUE	BROWN	YELLOW
INCHES	1×11	1×11	2×4	2×23	2×12	2×4
TOL (+/-)	+ 3/8, - 0	+ 3/8, - 0	+ 3/8, - 0	+ 3/8, - 0	+ 3/8, - 0	+ 3/8, - 0


CARTON CHARACTERISTICS

UNITS/CARTON	CARTONS/LAYER	#OF LAYER	UNITS/PALLET	PIECE WEIGHT	CARTON WEIGHT	PALLET WEIGHT
48				0.71 lbs	36.1 lbs	
CARTONS/PALLET	CARTON DIMENSIONS	PALLET DIMENSIONS	PALLET DIMENSIONS LOADED, INCLUDING WOOD PALLET			
	14.8×12.8×5.9					

PRODUCT PHOTO



ELECTRICAL DIAGRAM

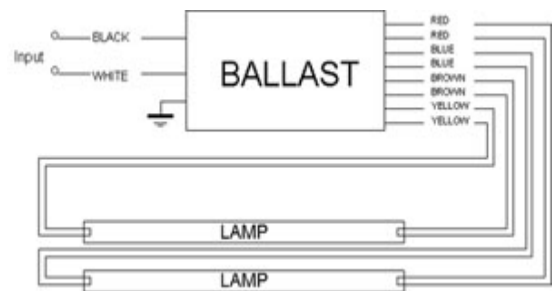

PRODUCT LABEL

<p>BallastWise™ ELECTRONIC BALLAST</p> <p>Cat.No:DXE2M5 Type 1 Outdoor Input:120V/60Hz Rapid Start Max. Current:0.40A Sound Rating:A Power Factor:0.60 O.C.V.:400VRMS Start Temp:0°F~120°F Class:P Linear Lamp:2*F13T5,2*F8T5,1*F13T5+1*F8T5</p>	LISTED E178684 61FK DEXIN LIGHTING 1-866-4DEXIN8 DATE:	<p>WARNING: Insulate unused lead(s) for 1000V. Install per National and Local Electrical Codes. Ground Ballast & Mount within 3/4" of ground Metal Reflector.</p>
--	--	--