

BallastWise[®]



FLUORESCENT BALLAST SPECIFICATIONS

DESCRIPTION

CATALOG	TYPE	STARTING METHOD	NUMBER OF LAMPS	LAMP TYPE
DXE 2M8	Electronic	Instant Start	2	F18T8, F15T8

ELECTRICAL CHARACTERISTICS

INPUT VOLTAGE	LAMP WATTS	INPUT WATTS	INPUT CURRENT	OCV	PF	FREQUENCY	SOUND RATED
120V	18w, 15w	Max 64	Max 0.50A	600VRMS	0.60	60HZ	A
MIN START TEMP	CLASS	TYPE	BALLAST FACTOR	BEF	THD(1)		
0°F	P	1Outdoor	0.92	2.555	<110%	NO PCB'S	

	CASE DIMENSIONS				
	UNITS	M	L	W	H
	INCHES	5.30	5.50	1.70	1.00
	TOL (+/-)	0.05	0.05	0.05	0.05
	LEAD LENGTH				
	UNITS	BLACK	WHITE	RED	BLUE
INCHES	1x16	1x16	1x36	2x24	
TOL (+/-)	+ 3/8, - 0	+ 3/8, - 0	+ 3/8, - 0	+ 3/8, - 0	


CARTON CHARACTERISTICS

UNITS/CARTON	CARTONS/LAYER	#OF LAYER	UNITS/PALLET	PIECE WEIGHT	CARTON WEIGHT	PALLET WEIGHT
48				0.7 lbs	35.3 lbs	
CARTONS/PALLET	CARTON DIMENSIONS	PALLET DIMENSIONS	PALLET DIMENSIONS LOADED, INCLUDING WOOD PALLET			
	14.2x12.2x5.3					

PRODUCT PHOTO



ELECTRICAL DIAGRAM

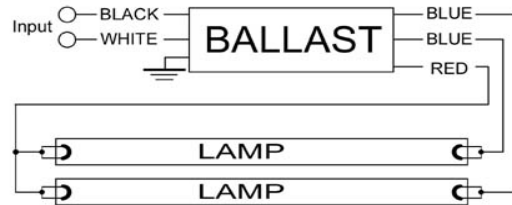

PRODUCT LABEL

<p>Ballast Wise[™]</p> <p>ELECTRONIC BALLAST</p> <p>Cat No: DXE2M8 Type 1 Outdoor</p> <p>Input: 120V/60Hz Instant Start</p> <p>Max. Current: 0.50A Sound Rating: A</p> <p>Power Factor: 0.60 C.V.: 750VRMS</p> <p>Start Temp: -20°F ~ 120°F Class: P</p> <p>Linear Lamp: 2 * F18T8, 2 * F15T8</p>	<p>UL LISTED E178684</p> <p>61FK</p> <p>DEXIN LIGHTING</p> <p>1-866-4DEXIN8</p>	<p>Input: BLACK, WHITE</p> <p>Output: BLUE, BLUE, RED</p> <p>LAMP, LAMP</p> <p>WARNING: Insulate unused lead(s) for 1000V. Install per National and Local Electrical Codes. Ground Ballast & Mount Within 3/4" of ground Metal Reflector.</p> <p>DATE:</p>
--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	---------------------------------------------------------------------------------	----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

