

BallastWise[®]



FLUORESCENT BALLAST SPECIFICATIONS


DESCRIPTION

CATALOG	TYPE	STARTING METHOD	NUMBER OF LAMPS	LAMP TYPE
DXE 2M8RS	Electronic	Rapid Start	2	F32T8, F40T12, F34T12, F25T12

ELECTRICAL CHARACTERISTICS

INPUT VOLTAGE	LAMP WATTS	INPUT WATTS	INPUT CURRENT	OCV	PF	FREQUENCY	SOUND RATED
120V	32W, 40W, 34W, 25W	58W	0.88A	400VRMS	0.55	60HZ	A
MIN START TEMP	CLASS	TYPE	BALLAST FACTOR	BEF	THD (1)	NO PCB'S	
-20° F/-28.8°C	P	1 Outdoor	0.88	1.517	<120%		

PHYSICAL CHARACTERISTICS

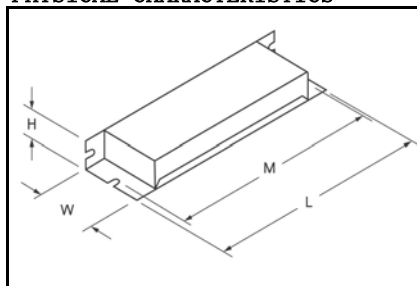

CASE DIMENSIONS

UNITS	M	L	M	H	
INCHES	5.00	5.50		1.70	1.00
TOL (+/-)	0.05	0.05		0.05	0.05

LEAD LENGTH

UNITS	BLACK	WHITE	RED	BROWN	BLUE	YELLOW
INCHES	1×16	1×16	2×36	2×36	2×24	2×24
TOL (+/-)	+3/8, -0	+3/8, -0	+3/8, -0	+3/8, -0	+3/8, -0	+3/8, -0


CARTON CHARACTERISTICS

UNITS/CARTON	CARTONS/LAYER	#OF LAYER	UNITS/PALLET	PIECE WEIGHT	CARTON WEIGHT	PALLET WEIGHT
48				0.71 lbs	36.1 lbs	
CARTONS/PALLET	CARTON DIMENSIONS	PALLET DIMENSIONS	PALLET DIMENSIONS LOADED, INCLUDING WOOD PALLET			
	14.8×12.8×5.9					

PRODUCT PHOTO



ELECTRICAL DIAGRAM

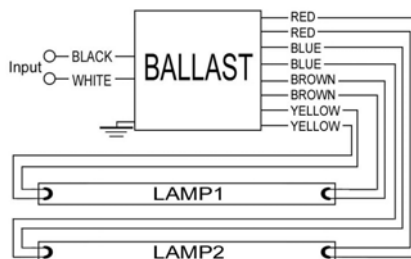

Ballast Wise[™]

ELECTRONIC BALLAST

Cat.No DXE2M8 Type 1 Outdoor
 Input: 120V/60Hz Rapid Start
 Max. Current: 0.88A Sound Rating: A
 Power Factor: 0.55 O.C.V.:400VRMS
 Start Temp:-20°F ~ 120°F Class: P
 Linear Lamp: 2°F32T8,2°F40T12,2°F34T12,2°F25T12




LISTED
E178684
61FK

DEXIN LIGHTING

1-866-4DEXIN8

DATE:



WARNING:
 Insulate unused lead(s) for 1000V.
 Install per National and Local Electrical Codes.
 Ground Ballast & Mount within 3.4" of
 ground Metal Reflector.

