

# BallastWise<sup>®</sup>



## FLUORESCENT BALLAST SPECIFICATIONS

### DESCRIPTION

CATALOG	TYPE	STARTING METHOD	NUMBER OF LAMPS	LAMP TYPE
DXE3H12	Electronic	Instant Start	3	F40T12, F34T12, F25T12

2

INPUT VOLTAGE	LAMP WATTS	INPUT WATTS	INPUT CURRENT	OCV	PF	FREQUENCY	SOUND RATED
120V	40W, 34W, 25W	107	Max1.05A	600VRMS	0.95	60HZ	A
MIN START TEMP	CLASS	TYPE	BALLAST FACTOR	BEF	THD(1)	NO PCB'S	
- 20°F / - 28.8°C	P	10outdoor	0.92	0.86	<35%		

### PHYSICAL CHARACTERISTICS

	CASE DIMENSIONS				
	UNITS	M	W	L	H
	INCHES	8.90	9.50	2.33	1.57
	TOL (+/-)	0.05	0.05	0.05	0.05
	LEAD LENGTH				
	UNITS	BLACK	WHITE	RED	BLUE
INCHES	1×16	1×16	1×36	3×24	
TOL (+/-)	+ 3/8, - 0	+ 3/8, - 0	+ 3/8, - 0	+ 3/8, - 0	


### CARTON CHARACTERISTICS

UNITS/CARTON	CARTONS/LAYER	#OF LAYER	UNITS/PALLET	PIECE WEIGHT	CARTON WEIGHT	PALLET WEIGHT
20				1.5 lbs	31.3 lbs	
CARTONS/PALLET	CARTON DIMENSIONS	PALLET DIMENSIONS	PALLET DIMENSIONS LOADED, INCLUDING WOOD PALLET			
	13.2×10.6×6.7					

### PRODUCT PHOTO



### ELECTRICAL DIAGRAM

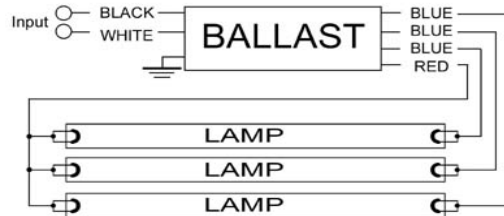

### PRODUCT LABEL

<b>Ballast Wise<sup>TM</sup></b> ELECTRONIC BALLAST Cat No: DXE3H12 Type: Outdoor Sound Rating: A Start Temp: 0°F-120°F Linear Lamp: 3×F40T12, 3×F34T12, 3×F25T12	<b>Input: 120V 60Hz</b> Max. Line Current: 1.05 A Power Factor: 0.95	<b>UL US</b> LISTED E178684 61FK <b>DEXIN LIGHTING</b> 1-866-4DEXIN8 COVINA CA91722	 DATE:
---	--	---	-----------