

# BallastWise<sup>®</sup>



## FLUORESCENT BALLAST SPECIFICATIONS

### DESCRIPTION

CATALOG	TYPE	STARTING METHOD	NUMBER OF LAMPS	LAMP TYPE
DXE3H8	Electronic	Instant Start	3	F32T8, F25T8, F17T8, F30T8, F18T8, F15T8

### ELECTRICAL CHARACTERISTICS

INPUT VOLTAGE	LAMP WATTS	INPUT WATTS	INPUT CURRENT	OCV	PF	FREQUENCY	SOUND RATED
120V	32w, 25w, 17w, 30w, 18w, 15w	87w	Max. 0.84A	600VRMS	0.95	60HZ	A
MIN START TEMP	CLASS	TYPE	BALLAST FACTOR	BEF	THD(1)	NO PCB'S	
0°F	P	1Outdoor	0.92	1.06	<30%		


### PHYSICAL CHARACTERISTICS

	CASE DIMENSIONS				
	UNITS	M	L	W	H
	INCHES	8.90	9.50	1.70	1.20
	TOL (+/-)	0.05	0.05	0.05	0.05
	LEAD LENGTH				
	UNITS	BLACK	WHITE	RED	BLUE
INCHES	1×16	1×16	1×36	3×24	
TOL (+/-)	+ 3/8, - 0	+ 3/8, - 0	+ 3/8, - 0	+ 3/8, - 0	


### CARTON CHARACTERISTICS

UNITS/CARTON	CARTONS/LAYER	#OF LAYER	UNITS/PALLET	PIECE WEIGHT	CARTON WEIGHT	PALLET WEIGHT
20				1.5 lbs	31.3 lbs	
CARTONS/PALLET	CARTON DIMENSIONS	PALLET DIMENSIONS	PALLET DIMENSIONS LOADED, INCLUDING WOOD PALLET			
	13.2×10.6×6.7					

### PRODUCT PHOTO

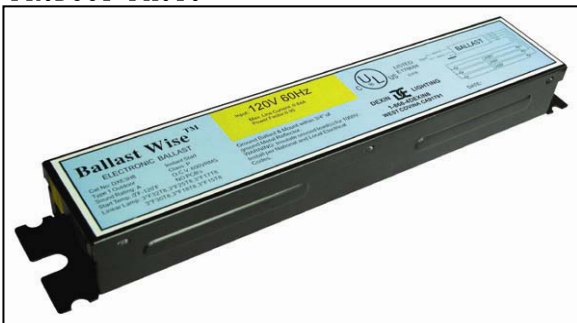

### ELECTRICAL DIAGRAM

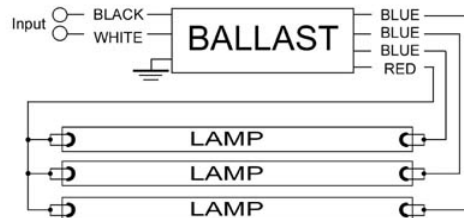

### PRODUCT LABEL

<b>Ballast Wise<sup>™</sup></b> ELECTRONIC BALLAST Cat No: DXE3H8    Instant Start Type 1 Outdoor    Class P Sound Rating A    O.C.V.:600VRMS Start Temp: -20°F-120°F    NO PCB'S Linear Lamp: 3'F32T8, 3'F25T8, 3'F17T8 3'F25T12, 3'F34T12, 3'F40T12 3'F30T8, 3'F18T8, 3'F15T8	Input <b>120V 60Hz</b> Max. Line Current: 0.84A Power Factor: 0.95	LISTED E178684 61FK <b>DEXIN LIGHTING</b> 1-866-4DEXIN8 COVINA CA91722	
	WARNING: Insulate unused lead(s) for 1000V. Install per National and Local Electrical Codes. Ground Ballast & Mount within 3/4" of ground Metal Reflector.		