

# BallastWise<sup>®</sup>



## FLUORESCENT BALLAST SPECIFICATIONS

### DESCRIPTION

CATALOG	TYPE	STARTING METHOD	NUMBER OF LAMPS	LAMP TYPE
DXE3M8	Electronic	Instant Start	3	F32T8, F25T8, F17T8, F25T12, F34T12, F40T12, F30T8, F18T8, F15T8

### ELECTRICAL CHARACTERISTICS

INPUT VOLTAGE	LAMP WATTS	INPUT WATTS	INPUT CURRENT	OCV	PF	FREQUENCY	SOUND RATED
120V	32w, 25w, 17w, 25w, 34w, 40w, 30w, 18w, 15w	86w	Max. 1.40A	600VRMS	0.55	60HZ	A
MIN START TEMP	CLASS	TYPE	BALLAST FACTOR		BEF	THD(1)	NO PCB'S
-20°F / -28.8°C	P	1 Outdoor	0.88		1.023	<120%	

### PHYSICAL CHARACTERISTICS

	CASE DIMENSIONS				
	UNITS	M	L	W	H
	INCHES	8.90	9.50	1.70	1.20
	TOL (+/-)	0.05	0.05	0.05	0.05
LEAD LENGTH					
UNITS	BLACK	WHITE	RED	BLUE	
INCHES	1×16	1×16	1×36	3×24	
TOL (+/-)	+ 3/8, 0	+ 3/8, 0	+ 3/8, 0	+ 3/8, 0	


### CARTON CHARACTERISTICS

UNITS/CARTON	CARTONS/LAYER	#OF LAYER	UNITS/PALLET	PIECE WEIGHT	CARTON WEIGHT	PALLET WEIGHT
20				1.2 lbs	35.7 lbs	
CARTONS/PALLET		CARTON DIMENSIONS	PALLET DIMENSIONS	PALLET DIMENSIONS LOADED, INCLUDING WOOD PALLET		
		13.2×10.6×6.7				

### PRODUCT PHOTO



### ELECTRICAL DIAGRAM

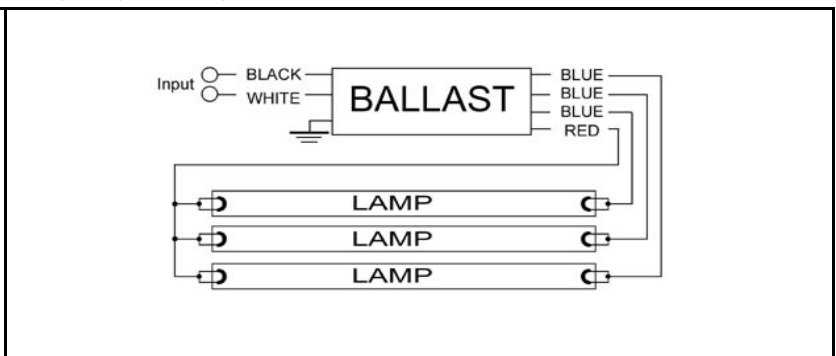

### PRODUCT LABEL

<p><b>BallastWise<sup>™</sup></b> ELECTRONIC BALLAST</p> <p>Cat No: DXE3M8 Type 1 Outdoor Sound Rating A Start Temp: -20°F-120°F Lamp Type: 3°F32T8, 3°F25T8, 3°F17T8, 3°F25T12, 3°F34T12, 3°F40T12, 3°F30T8, 3°F18T8, 3°F15T8</p>	<p>Input: <b>120V 60Hz</b> Max. Line Current: 1.40A Power Factor: 0.55 Line Current THD&lt;120%</p>	<p><b>UL</b> C US LISTED E178684 61FK <b>DEXIN DE LIGHTING</b> 1-866-433-9468</p>	<p>WARNING: Insulate unused Lead(s) for 1000V. Install per National and Local Electrical Codes. Ground Ballast &amp; Mount Within 3/4" of ground Metal Reflector.</p> <p>DATE:</p>
--	---	---	--