

BallastWise®



FLUORESCENT BALLAST SPECIFICATIONS

DESCRIPTION

CATALOG	TYPE	NUMBER OF LAMPS	LAMP TYPE
DXE400HID1	Electronic	1	MH Lamp 400W

ELECTRICAL CHARACTERISTICS

INPUT VOLTAGE	LAMP WATTS		INPUT WATTS	INPUT CURRENT	PF	FREQUENCY	SOUND RATED
120V	400W		440W	4.07A	>0.90	60Hz	A
START TEMP	CLASS	TYPE	BALLAST FACTOR	BEF	THD (1)	NO PCB'S	
0°F ~ 120°F	P	1 Outdoor	1.00	0.227	<25%		


PHYSICAL CHARACTERISTICS

	CASE DIMENSIONS					
	UNITS	M	L	W	H	
	INCHES	11.22"	11.42"	4.13"	3.15"	
	TOL (+/-)	0.39	0.39	0.39	0.39	
	LEAD LENGTH					
	UNITS	BLACK	WHITE	GREEN	RED	BLUE
	INCHES	14.17"	14.17"	14.17"	14.17"	14.17"
	TOL (+/-)	0.39	0.39	0.39	0.39	0.39

PRODUCT PHOTO



ELECTRICAL DIAGRAM

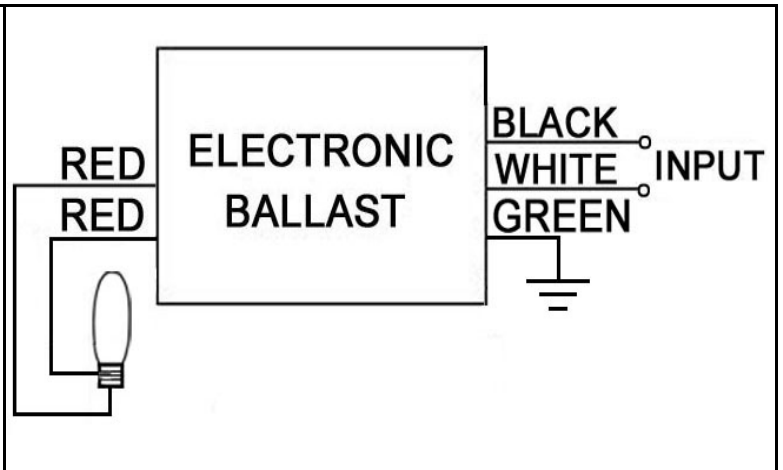

PRODUCT LABEL

BallastWise™
ELECTRONIC BALLAST
 MODEL NO. : DXE400HID1

Input Voltage: 120V/60Hz
Input Current: 4.07A
Input Power: 440W
High Power Factor

DATE: _____

Type 1 Outdoor Class: P
 Sound Rating: A
 No PCB'S 3THD: <25%
 Start Temp: 0°F~120°F
 MH Lamp: 400W

Note:
 • Do not install insulation around ballast sides.
 • Max. Mounting distance: 118".
 • Ballast case must be grounded.
 • Maximum case temperature is 158°F.
 • Use 4.0kV pulse rated lampholder.

CAUTION:
 • DISCONNECT POWER BEFORE SERVICING.
 • DO NOT CONNECT LAMP LEADS TO NEUTRAL.

LISTED E178684 61FK
DEXIN LIGHTING
 1-866-4DEXIN8