

BallastWise®



FLUORESCENT BALLAST SPECIFICATIONS

DESCRIPTION

CATALOG NO.	TYPE	STARTING METHOD	NUMBER OF LAMPS	LAMP TYPE
DXE424HO51	Electronic	Instant Start	4	F25/30/34/40T12,F39/24T5H O


ELECTRICAL CHARACTERISTICS

INPUT VOLTAGE	REQUENCY	LAMP WATTS	INPUT WATTS	INPUT CURRENT	THD	PF	SOUND RATED A	
120V	60Hz	25/30/34/40W 39/24W	146W	Max 1.28A	<30%	0.95		
MIN START TEMP	Class P	TYPE 1 Outdoor	BALLAST FACTOR		BEF	O.C.V.	BALLAST FREQUENCY	NO PCB'S
0°F/18°C			0.92	0.630	600VRMS	>40kHz		

PHYSICAL CHARACTERISTICS

	CASE DIMENSIONS				
	UNITS	M	L	W	H
	INCHES	8.40	8.50	1.73	1.00
	TOL(+/-)	0.05	0.05	0.05	0.05
LEAD LENGTH					
UNITS	BLACK	WHITE	RED	YELLOW	BLUE
INCHES	1x16	1x16	2x24	2x36	2x24
TOL(+/-)	+3/8,-0	+3/8,-0	+3/8,-0	+3/8,-0	+3/8,-0

PRODUCT PHOTO

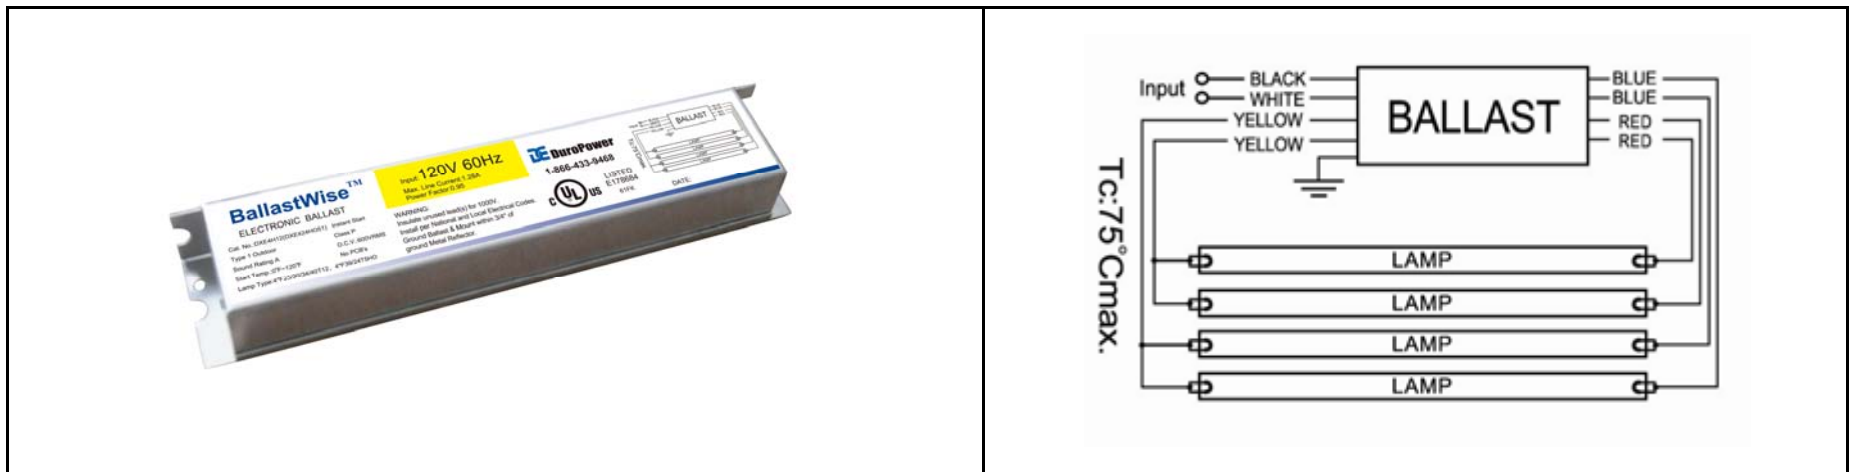

PRODUCT LABEL

<p>BallastWise™ ELECTRONIC BALLAST</p> <p>Cat. No.:DXE4H12(DXE424HO51) Instant Start Type 1 Outdoor Class P Sound Rating A O.C.V.:600VRMS Start Temp.:0°F~120°F No PCB's Lamp Type:4*F25/30/34/40T12, 4*F39/24T5HO</p>	<p>Input: 120V 60Hz Max. Line Current:1.28A Power Factor:0.95</p>	<p>DuroPower 1-866-433-9468</p> <p> LISTED E178684 61FK</p>	<p>DATE:</p>
---	---	--	--------------

WARNING: Insulate unused lead(s) for 1000V. Install per National and Local Electrical Codes. Ground Ballast & Mount within 3/4" of ground Metal Reflector.