

# BallastWise<sup>®</sup>



## FLUORESCENT BALLAST SPECIFICATIONS


### DESCRIPTION

CATALOG	TYPE	STARTING METHOD	NUMBER OF LAMPS	LAMP TYPE
DXE 496HO121	Electronic	Instant Start	4	F96T12HO, F84T12HO, F72T12HO, F64T12HO, F60T12HO, F48T12HO

### ELECTRICAL CHARACTERISTICS

INPUT VOLTAGE	LAMP WATTS	INPUT WATTS	INPUT CURRENT	OCV	PF	FREQUENCY	SOUND RATED
120V	95W, 100W, 85W, 80W, 75W, 60W	351W	Max. 3.18A	600VRMS	0.95	60HZ	A
MIN START TEMP	CLASS	TYPE	BALLAST FACTOR	BEF	THD (3)	NO PCB'S	
-20° F / -28.8°C	P	1 Outdoor	0.88	0.251	<30%		

### PHYSICAL CHARACTERISTICS

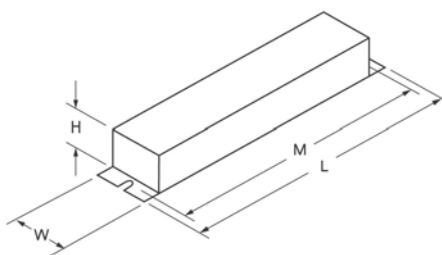	CASE DIMENSIONS					
	UNITS	M	X	L	W	H
	INCHES	13.5	2.4	14.25	3.19	2.19
TOL (+/-)	0.05	0.05	0.05	0.05	0.05	
LEAD LENGTH						
UNITS	BLACK	WHITE	RED	YELLOW	BLUE	BROWN
INCHES	1×44	1×44	1×68	1×68	2×44	2×44
TOL (+/-)	+3/8, -0	+3/8, -0	+3/8, -0	+3/8, -0	+3/8, -0	+3/8, -0


### CARTON CHARACTERISTICS





UNITS/CARTON	CARTONS/LAYER	#OF LAYER	UNITS/PALLET	PIECE WEIGHT	CARTON WEIGHT	PALLET WEIGHT
CARTONS/PALLET	CARTON DIMENSIONS	PALLET DIMENSIONS	PALLET DIMENSIONS LOADED, INCLUDING WOOD PALLET			

### PRODUCT PHOTO

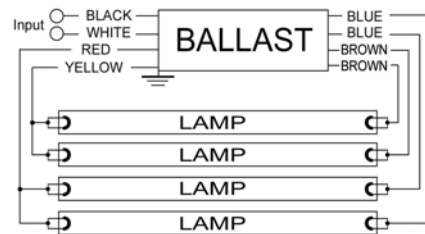

### ELECTRICAL DIAGRAM



<b>Ballast Wise™</b> ELECTRONIC BALLAST Cat No: DXE496HO121    Sound Rating A Type: 1 Outdoor    O.C.V. 600V/RMS Instant Start    Class P Start Temp: 0°F-120°F    No PCB's	Input: 120V/60Hz Max Line Current: 3.18A    Power Factor: 0.95 Lamp Type: 4*F96T12HO/95W, 4*F84T12HO/100W, 4*F72T12HO/85W, 4*F64T12HO/80W, 4*F60T12HO/75W	 LISTED E178684 61FK  1-866-4DEXIN8	 <b>WARNING</b> Risk of Electric shock • Turn power off before servicing • Properly ground ballast and fixing	 DATE:
	<b>WARNING:</b> Insulate unused lead(s) for 1000V. Install per National and Local Electrical Codes. Ground Ballast & Mount within 3/4" of ground Metal Reflector.			

