

# BallastWise<sup>®</sup>



## FLUORESCENT BALLAST SPECIFICATIONS

### DESCRIPTION

CATALOG	TYPE	STARTING METHOD	NUMBER OF LAMPS	LAMP TYPE
DXE4H8	Electronic	Instant Start	4	F15T8, F17T8, F18T8, F25T8, F30T8, F32T8

### ELECTRICAL CHARACTERISTICS

INPUT VOLTAGE	LAMP WATTS	INPUT WATTS	INPUT CURRENT	OCV	PF	FREQUENCY	SOUND RATED
120V	32w, 25w, 17w, 30w, 18w, 15w	113w	Max. 1.12A	600VRMS	0.95	60HZ	A
MIN START TEMP	CLASS	TYPE	BALLAST FACTOR	BEF	THD(1)	NO PCB'S	
0°F	P	1Outdoor	0.92	0.81	<30%		

### PHYSICAL CHARACTERISTICS

	CASE DIMENSIONS				
	UNITS	M	L	W	H
	INCHES	8.9	9.5	1.7	1.2
	TOL (+/-)	0.05	0.05	0.05	0.05
	LEAD LENGTH				
	UNITS	BLACK	WHITE	RED	BLUE
INCHES	1×16	1×16	2×24	2×24	2×36
TOL (+/-)	+ 3/8, - 0	+ 3/8, - 0	+ 3/8, - 0	+ 3/8, - 0	+ 3/8, - 0


### CARTON CHARACTERISTICS

UNITS/CARTON	CARTONS/LAYER	#OF LAYER	UNITS/PALLET	PIECE WEIGHT	CARTON WEIGHT	PALLET WEIGHT
20				1.5 lbs	31.3 lbs	
CARTONS/PALLET	CARTON DIMENSIONS	PALLET DIMENSIONS	PALLET DIMENSIONS LOADED, INCLUDING WOOD PALLET			
	12.6×10.1×6.1					

### PRODUCT PHOTO



### ELECTRICAL DIAGRAM

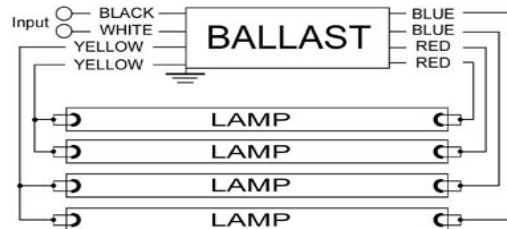

### PRODUCT LABEL

<b>Ballast Wise<sup>™</sup></b> ELECTRONIC BALLAST Cat. No: DXE4H8 Type 1 Outdoor Sound Rating: A Start Temp: -20°F-120°F Lamp Type: 4*F15T8, 4*F17T8, 4*F18T8, 4*F25T8, 4*F30T8, 4*F32T8	Instant Start Class: P O.C.V.: 600VRMS No PCB'S	<b>Input: 120V 60Hz</b> Max. Line Current: 0.10A Power Factor: 0.95	LISTED E178684 61FK <b>DEXIN LIGHTING</b> 1-866-4DEXIN8 COVINA CA91722	
---	--	---	---	--

WARNING: Insulate unused lead(s) for 1000V. Install per National and Local Electrical Codes. Ground Ballast & Mount within 3/4" of ground Metal Reflector.

DATE: \_\_\_\_\_

