

# BallastWise<sup>®</sup>



## FLUORESCENT BALLAST SPECIFICATIONS

### DESCRIPTION

CATALOG	TYPE	STARTING METHOD	NUMBER OF LAMPS	LAMP TYPE
DXE4H82	Electronic	Instant Start	4	F32T8, F25T8, F17T8, F40T12, F34T12

### ELECTRICAL CHARACTERISTICS

INPUT VOLTAGE	LAMP WATTS	INPUT WATTS	INPUT CURRENT	OCV	PF	FREQUENCY	SOUND RATED
277V	32W, 25W, 17W, 40W, 34W	109W	0.40A	580VRMS	0.99	60HZ	A
MIN START TEMP	CLASS	TYPE	BALLAST FACTOR	BEF	THD(1)	NO PCB'S	
0°F / -18°C	P	1 Outdoor	0.88	0.807	<10%		


### PHYSICAL CHARACTERISTICS

	CASE DIMENSIONS				
	UNITS	M	L	W	H
	INCHES	8.90	9.50	1.70	1.20
	TOL (+/-)	0.05	0.05	0.05	0.05
	LEAD LENGTH				
	UNITS	BLACK	WHITE	RED	BLUE
INCHES	1×16	1×16	2×24	2×24	2×36
TOL (+/-)	+3/8, -0	+3/8, -0	+3/8, -0	+3/8, -0	+3/8, -0


### CARTON CHARACTERISTICS

UNITS/CARTON	CARTONS/LAYER	#OF LAYER	UNITS/PALLET	PIECE WEIGHT	CARTON WEIGHT	PALLET WEIGHT
20				1.5 lbs	31.3 lbs	
CARTONS/PALLET	CARTON DIMENSIONS	PALLET DIMENSIONS	PALLET DIMENSIONS LOADED, INCLUDING WOOD PALLET			
	13.2×10.6×6.7					

### PRODUCT PHOTO

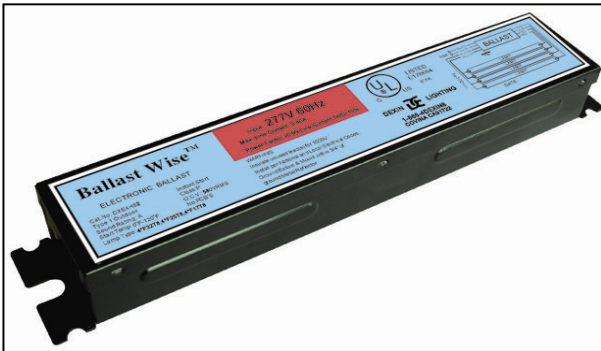

### ELECTRICAL DIAGRAM

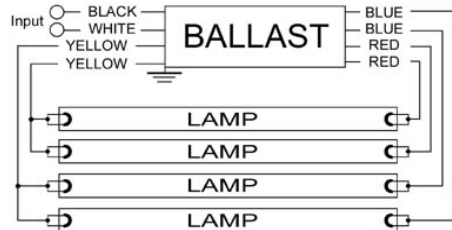

### PRODUCT LABEL

<b>Ballast Wise<sup>™</sup></b> ELECTRONIC BALLAST Cat.No: DXE4H82 Type 1 Outdoor Sound Rating: A Start Temp: 0°F-120°F Lamp Type: 4*F32T8, 4*F25T8, 4*F17T8	Input: 277V 60Hz Max. Line Current: 0.40A Power Factor >0.99 Line Current THD<10%	LISTED E178684 C US 61FK 1-888-4DEXIN8 COVINA CA91722	DATE:
	<b>WARNING:</b> Insulate unused lead(s) for 1000V. Install per National and Local Electrical Codes. Ground Ballast & Mount within 3/4" of ground Metal Reflector.		

