

BallastWise®



FLUORESCENT BALLAST SPECIFICATIONS

DESCRIPTION

CATALOG	TYPE	STARTING METHOD	NUMBER OF LAMPS	LAMP TYPE
DXE4H8U-HBF	Electronic	Instant Start	4	F32T8, F25T8, F17T8

ELECTRICAL CHARACTERISTICS

INPUT VOLTAGE	LAMP WATTS	INPUT WATTS	INPUT CURRENT	OCV	PF	FREQUENCY	SOUND RATED
120V to 277V	32w, 25w, 17w	143w	120V 1.29A 277V 0.55A	580VRMS	>0.99	50/60HZ	A
MIN START TEMP	CLASS	TYPE	BALLAST FACTOR	BEF	THD (I)	NO PCB'S	
0°F	P	1 Outdoor	1.15	0.804	<10%		

PHYSICAL CHARACTERISTICS

	CASE DIMENSIONS					
	UNITS	M	X	L	W	H
	INCHES	8.90	1.25	9.50	2.38	1.60
	TOL (+/-)	0.05	0.05	0.05	0.05	0.05
	LEAD LENGTH					
	UNITS	BLACK	WHITE	RED	BLUE	YELLOW
INCHES	1×16	1×16	2×24	2×24	2×36	
TOL (+/-)	+ 3/8, - 0	+ 3/8, - 0	+ 3/8, - 0	+ 3/8, - 0	+ 3/8, - 0	


CARTON CHARACTERISTICS

UNITS/CARTON	CARTONS/LAYER	#OF LAYER	UNITS/PALLET	PIECE WEIGHT	CARTON WEIGHT	PALLET WEIGHT
12				2.03 lbs	26.46	
CARTONS/PALLET	CARTON DIMENSIONS	PALLET DIMENSIONS	PALLET DIMENSIONS LOADED, INCLUDING WOOD PALLET			
	13.2×10.6×6.7					

PRODUCT PHOTO



ELECTRICAL DIAGRAM

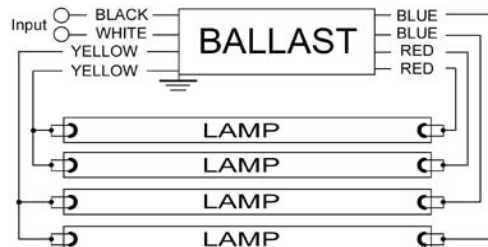

PRODUCT LABEL

Ballast Wise™ ELECTRONIC BALLAST Cat.No: DXE4H8U Instant Start Type 1 Outdoor Class P Sound Rating: A O.C.V.: 580VRMS Start Temp: 0°F-120°F NO PCB's Lamp Type: 4F 32T8, 4F25T8, 4F17T8	Input: 120 to 277 V 50/60Hz Max. Line Current: 120V@1.29A 277V@0.55A Power Factor >0.99 Line Current THD<10%	LISTED E178684 61FK 1-866-4DEXIN8	
	High Ballast Factor WARNING: Insulate unused lead(s) for 1000V. Install per National and Local Electrical Codes. Ground Ballast & Mount within 3/4" of ground Metal Reflector.		

