

BallastWise[®]



FLUORESCENT BALLAST SPECIFICATIONS


DESCRIPTION

CATALOG	TYPE	STARTING METHOD	NUMBER OF LAMPS	LAMP TYPE
DXE4H8U-NBF	Electronic	Instant Start	4	F32T8, F25T8, F17T8

ELECTRICAL CHARACTERISTICS

INPUT VOLTAGE	LAMP WATTS	INPUT WATTS	INPUT CURRENT	OCV	PF	FREQUENCY	SOUND RATED
120V to 277V	32w, 25w, 17w	110w	120V Max 0.99A 277V 0.42A	580VRMS	>0.99	50/60HZ	A
MIN START TEMP	CLASS	TYPE	BALLAST FACTOR	BEF	THD (1)	NO PCB'S	
0°F	P	1 Outdoor	0.88	0.8000	<10%		

PHYSICAL CHARACTERISTICS

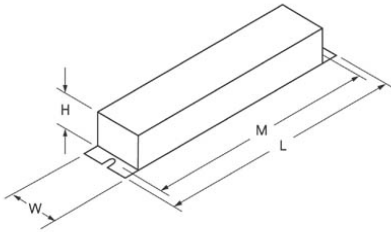

CASE DIMENSIONS

UNITS	M	L	W	H
INCHES	8.90	9.50	1.70	1.20
TOL (+/-)	0.05	0.05	0.05	0.05

LEAD LENGTH					
UNITS	BLACK	WHITE	RED	BLUE	YELLOW
INCHES	1×16	1×16	2×24	2×24	2×36
TOL (+/-)	+3/8, -0	+3/8, -0	+3/8, -0	+3/8, -0	+3/8, -0


CARTON CHARACTERISTICS

UNITS/CARTON	CARTONS/LAYER	#OF LAYER	UNITS/PALLET	PIECE WEIGHT	CARTON WEIGHT	PALLET WEIGHT
20				1.5 lbs	31.3 lbs	
CARTONS/PALLET	CARTON DIMENSIONS	PALLET DIMENSIONS	PALLET DIMENSIONS LOADED, INCLUDING WOOD PALLET			
	13.2×10.6×6.7					

PRODUCT PHOTO



ELECTRICAL DIAGRAM

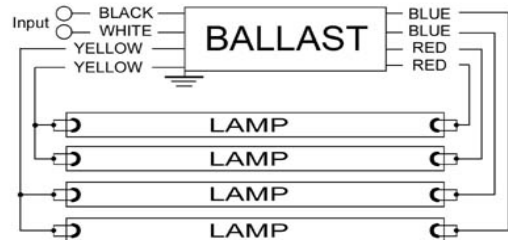

PRODUCT LABEL

Ballast Wise[™] ELECTRONIC BALLAST Cat.No: DXE4H8U Instant Start Type 1 Outdoor Class P Sound Rating: A O.C.V: 580VRMS Start Temp: 0°F-120°F NO PCB's Lamp Type: 4*F32T8, 4*F25T8, 4*F17T8	Input 120 to 277 V AC Max. Line Current: 1.00A @ 120V, 0.42A @ 277V Power Factor >0.99 Max Current: 1.00A @ 120V	 LISTED E178684 61FK DEXIN LIGHTING 1-866-4DEXIN8	 DATE:
	WARNING: Insulate unused Lead(s) for 1000V. Install per National and Local Electrical Codes. Ground Ballast & Mount within 3/4" of ground Metal Reflector.		

