

# BallastWise®



## FLUORESCENT BALLAST SPECIFICATIONS

### DESCRIPTION

CATALOG NO.	TYPE	STARTING METHOD	NUMBER OF LAMPS	LAMP TYPE
DXE824HO51	Electronic	Instant Start	8	F40T12,F34T12,F30T12, F39T5HO,F24T5HO,F20T12, PL42W/32W/26W,FC12T5(40W), PL36W/24W/18W,FC9T5(22W)


### ELECTRICAL CHARACTERISTICS

INPUT VOLTAGE	REQUENCY	LAMP WATTS	INPUT WATTS	INPUT CURRENT	THD	PF	SOUND RATED A	
120V	60Hz	40W,34W,30W 39W,24W,20W 42W/32W/26W,40W 36W/24W/18W,22W	292W	Max 2.56A	<30%	0.95		
MIN START TEMP	Class P	TYPE 1 Outdoor	BALLAST FACTOR		BEF	O.C.V.	BALLAST FREQUENCY	NO PCB'S
0°F/18°C			0.92	0.315	600VRMS	>40kHz		

### PHYSICAL CHARACTERISTICS

	CASE DIMENSIONS				
	UNITS	M	L	W	H
	INCHES	18.74	19.24	1.73	1.00
TOL(+/-)	0.05	0.05	0.05	0.05	
LEAD LENGTH					
UNITS	BLACK	WHITE	RED	YELLOW	BLUE
INCHES	1x16	1x16	4x24	4x36	4x24
TOL(+/-)	+3/8,-0	+3/8,-0	+3/8,-0	+3/8,-0	+3/8,-0

### PRODUCT PHOTO

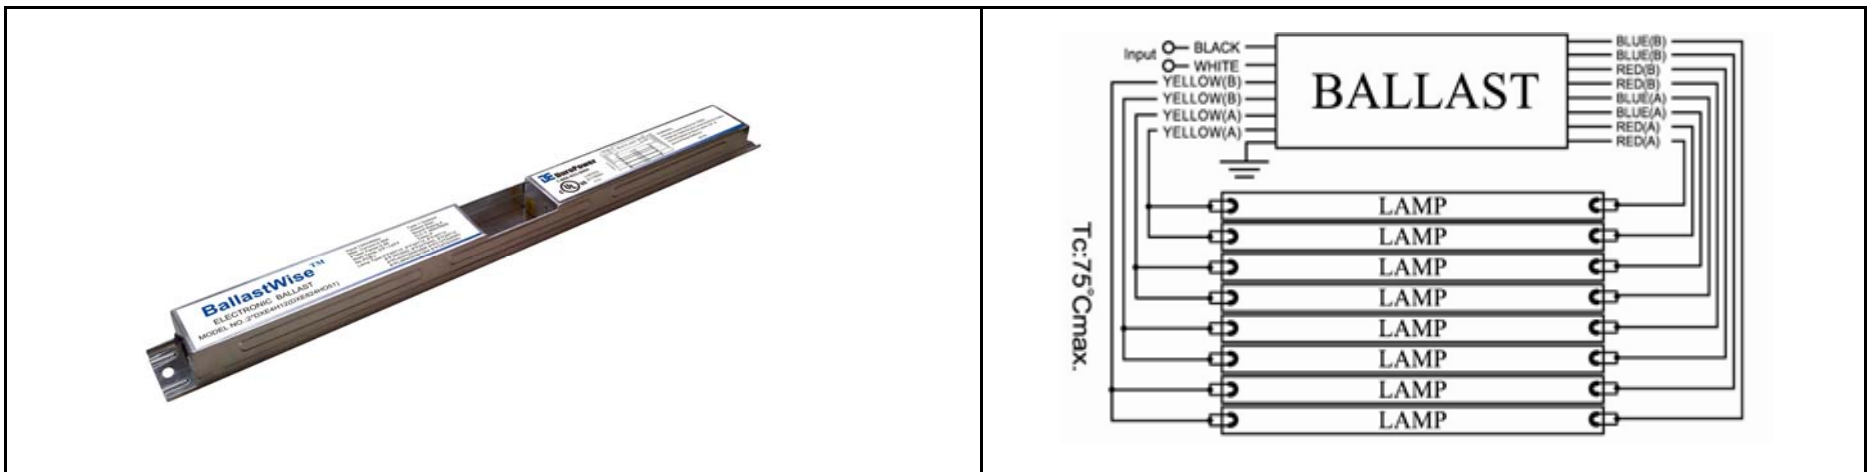

### PRODUCT LABEL

<p><b>BallastWise™</b> ELECTRONIC BALLAST MODEL NO.: 2*DXE4H12(DXE824HO51)</p>	<p>Input: 120V/60Hz Max. Current: 2.56A Power Factor: 0.95 Start Temp.: 0°F~120°F No PCB's</p>	<p>Type 1 Outdoor Instant Start Sound Rating A O.C.V.: 600VRMS Class P</p>	<p><b>DuroPower</b> 1-866-433-9468</p>	<p>LISTED E178684 61FK</p>		<p>WARNING: Insulate unused lead(s) for 1000V. Install per National and Local Electrical Codes. Ground Ballast &amp; Mount within 3/4" of ground Metal Reflector.</p>
	<p>Lamp Type: 8*F40T12, 8*F34T12, 8*F30T12 8*F39T5HO, 8*F24T5HO, 8*F20T12 8*PL42W/32W/26W 8*FC12T5(40W) 8*PL36W/24W/18W 8*FC9T5(22W)</p>	<p>DATE:</p>				