

BallastWise®



FLUORESCENT BALLAST SPECIFICATIONS

DESCRIPTION

CATALOG NO.	TYPE	STARTING METHOD	NUMBER OF LAMPS	LAMP TYPE
DXE848HO121	Electronic	Instant Start	8	F48T12HO,F42T12HO F36T12HO,F30T12HO F24T12HO,F18T12HO


ELECTRICAL CHARACTERISTICS

INPUT VOLTAGE	REQUENCY	LAMP WATTS	INPUT WATTS	INPUT CURRENT	THD	PF	SOUND RATED A	
120V	60Hz	60W,55W,50/45W, 50/42W,32W,25W	433W	3.80A	<30%	0.95		
MIN START TEMP	Class P	TYPE 1 Outdoor	BALLAST FACTOR		BEF	O.C.V.	BALLAST FREQUENCY	NO PCB'S
-20°F/-28.8°C			0.92	0.212	600VRMS	>40kHz		

PHYSICAL CHARACTERISTICS

CASE DIMENSIONS				
UNITS	M	L	W	H
INCHES	18.74	19.24	3.44	1.00
TOL(+/-)	0.05	0.05	0.05	0.05
LEAD LENGTH				
UNITS	BLACK	WHITE	RED	BLUE
INCHES	CONNECTOR	CONNECTOR	4x36	8x24
TOL(+/-)	1	1	+3/8,-0	+3/8,-0

PRODUCT PHOTO

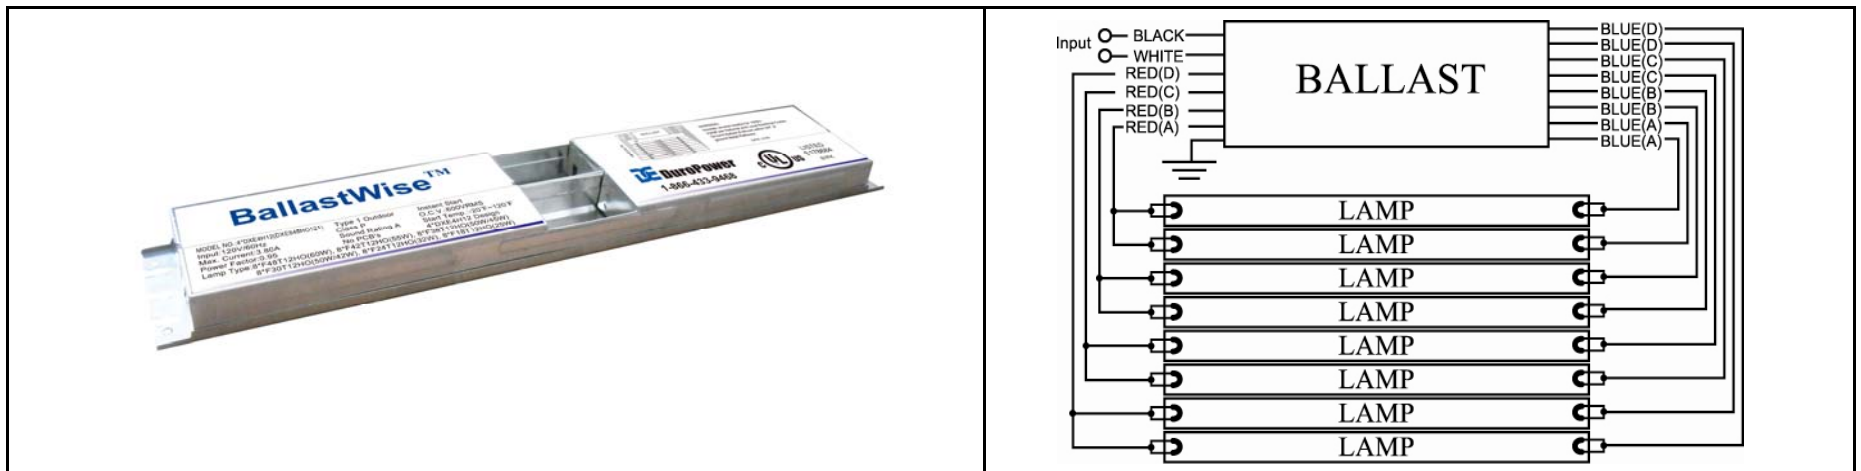

PRODUCT LABEL

		<p>WARNING: Insulate unused lead(s) for 1000V. Install per National and Local Electrical Codes. Ground Ballast & Mount within 3/4" of ground Metal Reflector.</p> <p>DATE: G105</p>
<p>MODEL NO.: 4*DXE4H12(DXE848HO121) Type 1 Outdoor Instant Start Input: 120V/60Hz Class P O.C.V.: 600VRMS Max. Current: 3.80A Sound Rating A Start Temp.: -20°F~-120°F Power Factor: 0.95 No PCB's 4*DXE4H12 Design Lamp Type: 8*F48T12HO(60W), 8*F42T12HO(55W), 8*F36T12HO(50W/45W) 8*F30T12HO(50W/42W), 8*F24T12HO(32W), 8*F18T12HO(25W)</p>	<p>1-866-433-9468</p>	<p>LISTED E178684 61FK</p>