

BallastWise[®]



FLUORESCENT BALLAST SPECIFICATIONS

DESCRIPTION

CATALOG	TYPE	STARTING METHOD	NUMBER OF LAMPS	LAMP TYPE
DXE150HID2	Electronic	Soft Start	1	150W MH Lamp

ELECTRICAL CHARACTERISTICS

INPUT VOLTAGE	LAMP WATTS	INPUT WATTS	INPUT CURRENT	OCV	PF	FREQUENCY	SOUND RATED
220V	150W	160W	0.80A	2.0KV RMS	>0.90	60HZ	A
MIN START TEMP	CLASS	TYPE	BALLAST FACTOR	BEF	THD (3)	NO PCB'S	
-20° F/-28.8°C	P	1 Outdoor	1.00	0.625	<25%		

PHYSICAL CHARACTERISTICS

	CASE DIMENSIONS			
	UNITS	M	L	H
	INCHES	5.94	6.14	1.71
	TOL (+/-)	0.05	0.05	0.05
	LEAD LENGTH			
UNITS	BLACK	WHITE	RED	RED
INCHES	8	8	10	10
TOL (+/-)	+ 3/8, - 0	+ 3/8, - 0	+ 3/8, - 0	+ 3/8, - 0


CARTON CHARACTERISTICS

UNITS/CARTON	CARTONS/LAYER	#OF LAYER	UNITS/PALLET	PIECE WEIGHT	CARTON WEIGHT	PALLET WEIGHT
16				2.31 lbs	39.3 lbs	
CARTONS/PALLET	CARTON DIMENSIONS	PALLET DIMENSIONS	PALLET DIMENSIONS LOADED, INCLUDING WOOD PALLET			
	15.7 x 15.7 x 5.1					

PRODUCT PHOTO



ELECTRICAL DIAGRAM

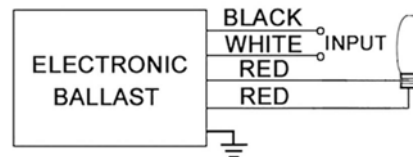

PRODUCT LABEL

BallastWise[™]
ELECTRONIC BALLAST
 MODEL NO. : DXE150HID2

Input Voltage: 220V/60Hz
 Input Current: 0.80A
 Input Power: 160W
 High Power Factor

DATE: _____

Type 1 Outdoor 3THD: <25%
 Sound Rating A Class P
 No PCB'S
 Start Temp.: -20°F~120°F
 MH Lamp: 150W

Note:

- Do not install insulation around ballast sides.
- Max. Mounting distance: 118".
- Ballast case must be grounded.
- Maximum case temperature is 158°F.
- Use 4.0kV pulse rated lampholder.

CAUTION:

- DISCONNECT POWER BEFORE SERVICING.
- DO NOT CONNECT LAMP LEADS TO NEUTRAL.

LISTED
 E178684
 61FK

DEXIN LIGHTING
 1-866-4DEXIN8

